

Specifications

Voltage Rating: 250V AC/ DC

Current Rating: 3A AC/DC

Withstanding Voltage: 1500V AC/Minute

Insulation Resistance: 1000MΩ Min.






Temperature Range: -25° C~+85° C

Contact Resistance: 20mΩ Max.

Pin Material: Brass/Gold-flash or Tin-plated

Material: PBT,UL94V-0

Q'ty/Bag: 1000PCS

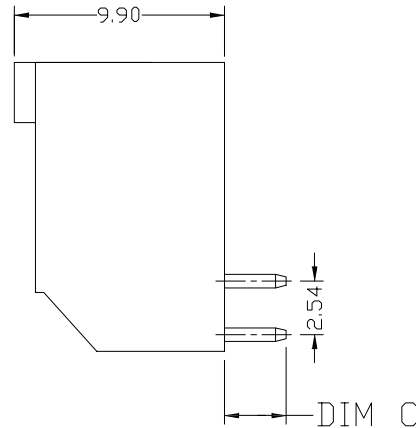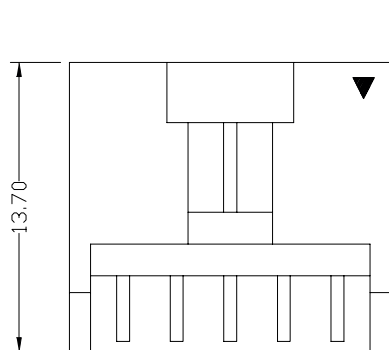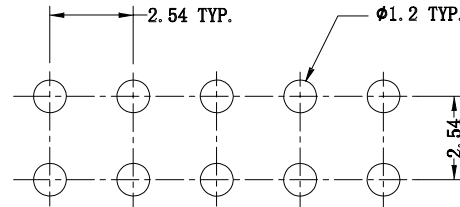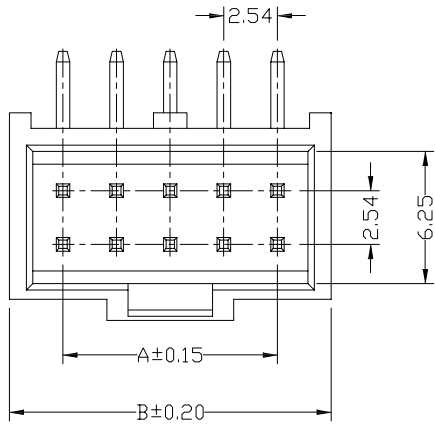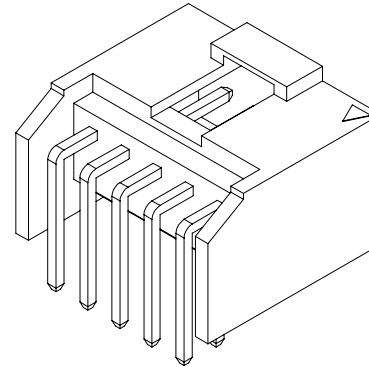

DIM C
2.50mm
2.90mm

Ordering Information & Dimensions


Poles	Dimensions (mm)	
	A	B
6	5.08	10.20
8	7.62	12.70
10	10.16	15.20
12	12.70	17.80
14	15.24	20.30
16	17.78	22.90
18	20.32	25.40
20	22.86	27.90
22	25.40	30.50
24	27.94	33.00
26	30.48	35.60
28	33.02	38.10
30	35.56	40.60
32	38.10	43.20
34	40.64	45.70
36	43.18	48.30
38	45.72	50.80
40	48.26	53.30

General description of ordering code

FAMILY	ROWS	N° POLES	VERSION	CLIP PLATING	DIMENSION "C"
GH254	2	XX	R [90°]	F [flash gold]	1 [2.50 mm]
				T [tin]	2 [2.90 mm]



UNITS: mm	SHEET SIZE: ISO A4		SCALE: ---
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5



INTERCO254