


**Electrical Specification:**  
 Rated Voltage:250V AV.DC  
 Rated Current:3A  
 Contact Resistance:20mΩ Max.  
 Insulation Resistance:1000MΩ Min.  
 Withstand voltage:1500V AC/Min  
 Temperature range for usage: -25°C~+85°C

**Material:**  
 Housing:Nylon 66 UL 94V-0 +GF15%  
 rass/Gold-flash

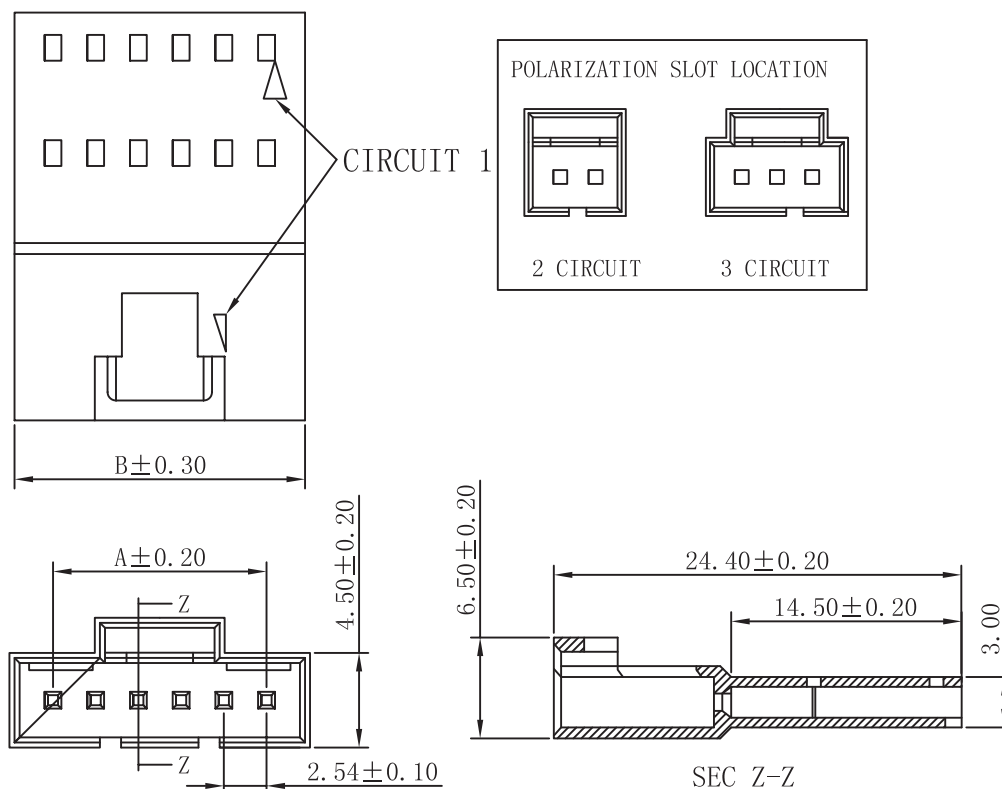

PART NO	Dimensions (mm)	
	A	B
02P	2.54	7.12
03P	5.08	9.66
04P	7.62	12.20
05P	10.16	14.74
06P	12.70	17.28
07P	15.24	19.82
08P	17.78	22.36
09P	20.32	24.90
10P	22.86	27.44
11P	25.40	29.98
12P	27.94	32.52
13P	30.48	35.06
14P	33.02	37.60
15P	35.56	40.14
16P	38.10	42.68
17P	40.64	45.22
18P	43.18	47.76
19P	45.72	50.30
20P	48.26	52.84

**General description of ordering code**

FAMILY	ROWS	N° POLES	VERSION	CLIP PLATING	TYPE
<b>GM254</b>	<b>1</b>	<b>XX</b>	<b>H</b> [Housing]	<b>F</b> [flash gold]	<b>F</b> [female]
					<b>T</b> [tin]



**euro-conn**



UNITS: mm		SHEET SIZE: ISO A4		SCALE: ---	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		



**INTERCO254**