






Electrical Specification:
 Rated Voltage:250V AV.DC
 Rated Current:3A
 Contact Resistance:20mΩ Max.
 Insulation Resistance:1000MΩ Min.
 Withstand voltage:1500V AC/Min
 Temperature range for usage: -25°C~+85°C

Material:
 Housing:Nylon 66 UL 94V-0 +GF15%
 rass/Gold-flash



2P

3P

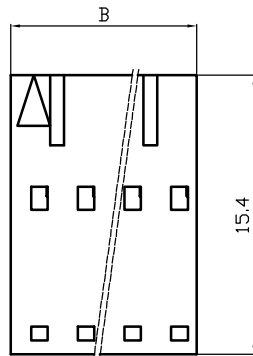

Poles	Dimensions mm	
	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
--	--	--
24	58.42	60.96

General description of ordering code

FAMILY	ROWS	N° POLES	VERSION	OPTION	TYPE
GM254	1	XX	H [Housing]	0 [void]	M [male]



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ---

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50


> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

INTERCO254