



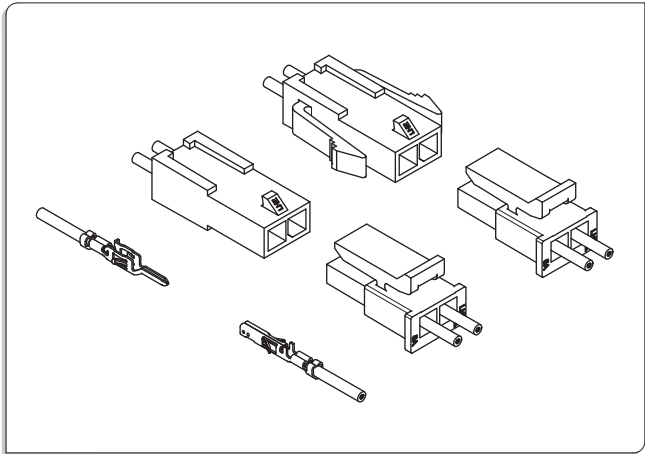


Specifications

- 1、 Poles : 2 to 12P
- 2、 Current rating : 5.0A AC,DC
- 3、 Voltage rating : 250V AC,DC
- 4、 Temperature range : -25°C to +85°C  
(Including temperature rise in applying electrical current)
- 5、 Contact resistance : Initial value /  $\leq 15\text{m}\Omega$   
After environmental testing /  $\leq 25\text{m}\Omega$
- 6、 Insulation resistance :  $\geq 1000\text{M}\Omega$
- 7、 Withstanding voltage : 1500V AC/minute
- 8、 Applicable wire : AWG #30 to #20

Mounting Measurement

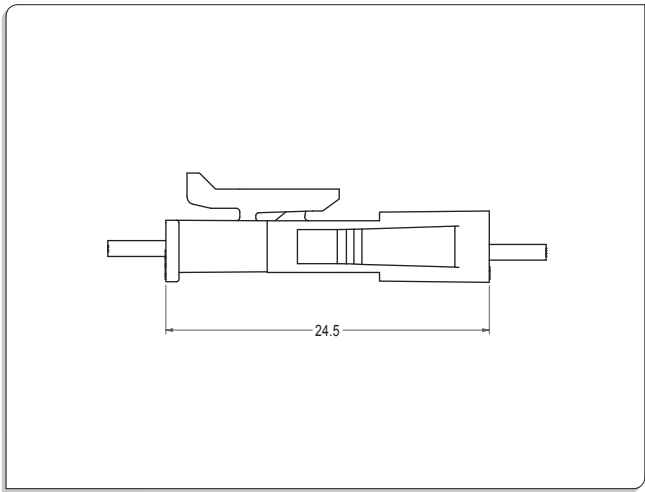


TERMINAL

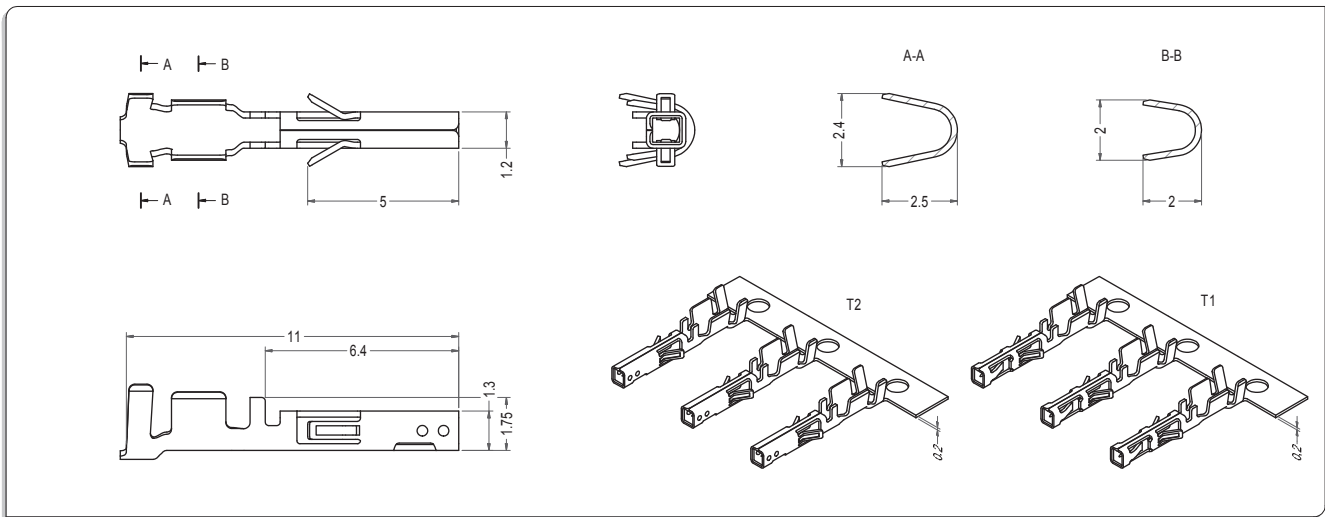

| Part No. | Section Area mm <sup>2</sup> | Wire Range     | Insulation O.D | Material        | Finish     | Qty/reel  |
|----------|------------------------------|----------------|----------------|-----------------|------------|-----------|
| RMFB-T2  | 0.22 to 0.52                 | AWG #24 to #20 | 1.2 to 1.9mm   | Phosphor bronze | Tin-plated | 10,000pcs |
| RMFB-T1  | 0.22 to 0.52                 | AWG #24 to #20 | 1.2 to 1.9mm   | Phosphor bronze | Tin-plated | 10,000pcs |



HOUSING

Material : Nylon 66 UL94V-0

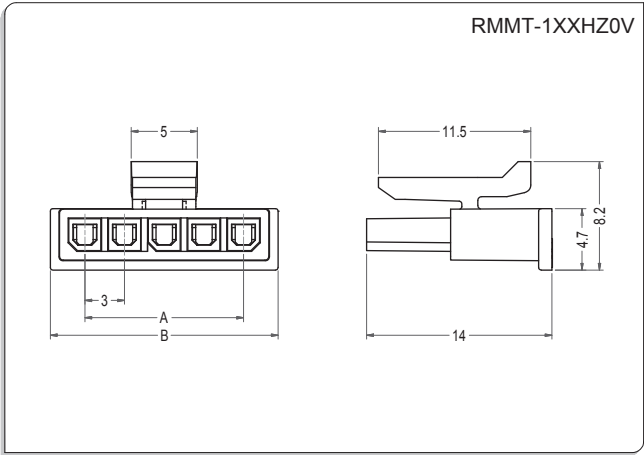


| Poles | Part No.     | DIM=A | DIM=B |
|-------|--------------|-------|-------|
| 2     | RMMT-102HZ0V | 3.00  | 8.20  |
| 3     | RMMT-103HZ0V | 6.00  | 11.20 |
| --    | -- --        | -- -- | -- -- |
| 12    | RMMT-112HZ0V | 33.00 | 38.20 |
| 2     | RMFT-102HZ2V | 3.00  | 6.85  |
| 3     | RMFT-103HZ2V | 6.00  | 9.85  |
| --    | -- --        | -- -- | -- -- |
| 12    | RMFT-112HZ2V | 33.00 | 36.85 |
| 2     | RMFT-102HZ0V | 3.00  | 6.85  |
| 3     | RMFT-103HZ0V | 6.00  | 9.85  |
| --    | -- --        | -- -- | -- -- |
| 12    | RMFT-112HZ0V | 33.00 | 36.85 |


Material : Nylon 66 UL94V-0

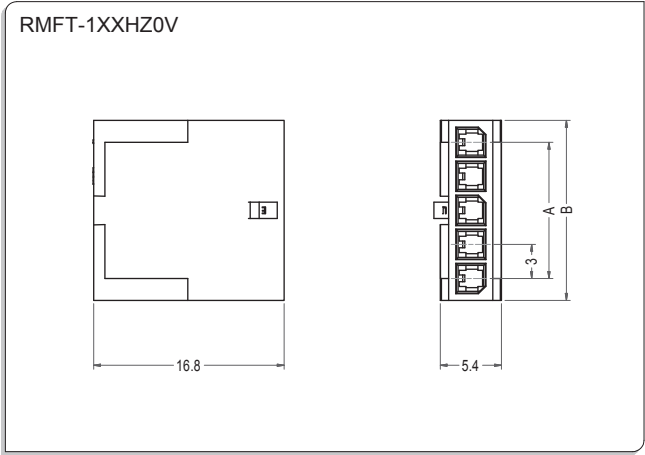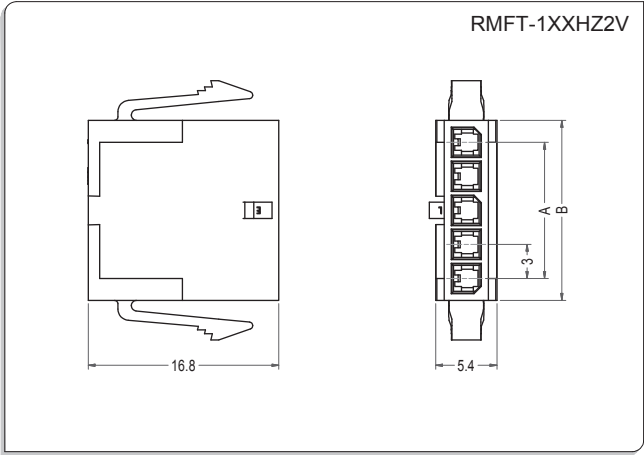

TERMINAL

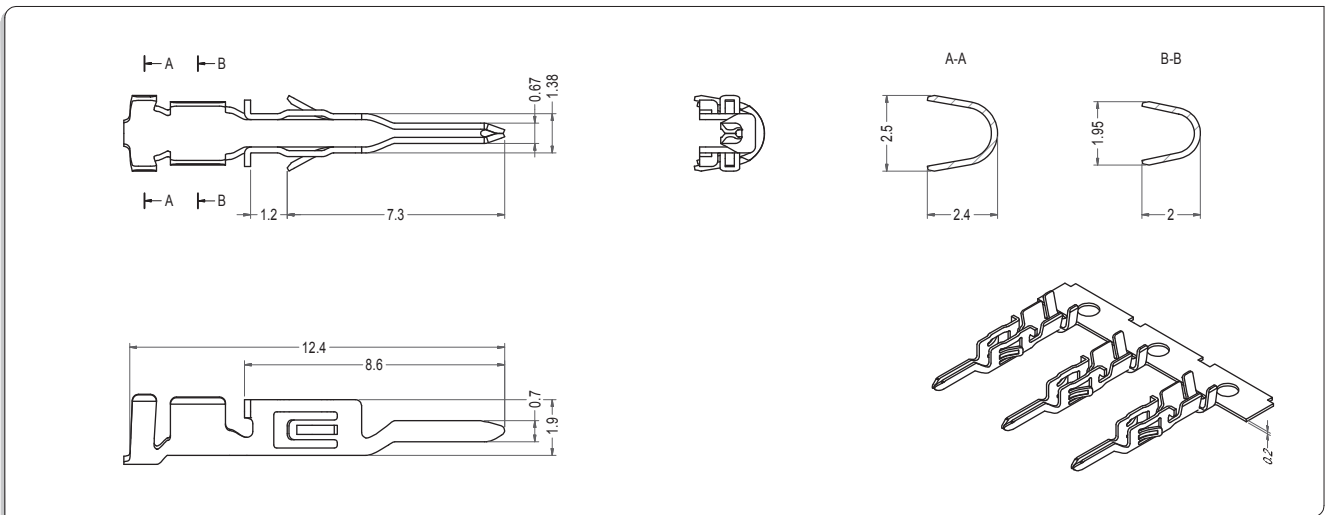


| Part No. | Section Area mm <sup>2</sup> | Wire Range     | Insulation O.D | Material        | Finish     | Qty/reel  |
|----------|------------------------------|----------------|----------------|-----------------|------------|-----------|
| RMMB-TT  | 0.22 to 0.52                 | AWG #24 to #20 | 1.2 to 1.9mm   | Phosphor bronze | Tin-plated | 10,000pcs |

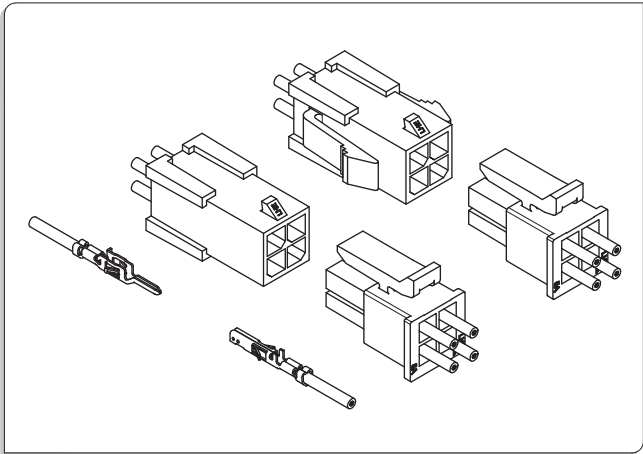


Specifications

- 1、 Poles : 1PX2 to 12PX2
- 2、 Current rating : 5.0A AC,DC
- 3、 Voltage rating : 250V AC,DC
- 4、 Temperature range : -25°C to +85°C  
(Including temperature rise in applying electrical current)
- 5、 Contact resistance : Initial value /  $\leq 15\text{m}\Omega$   
After environmental testing /  $\leq 25\text{m}\Omega$
- 6、 Insulation resistance :  $\geq 1000\text{M}\Omega$
- 7、 Withstanding voltage : 1500V AC/minute
- 8、 Applicable wire : AWG #30 to #20

Mounting Measurement

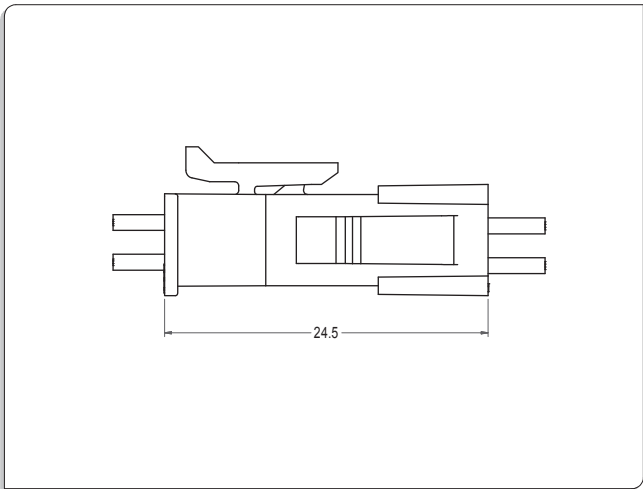


TERMINAL

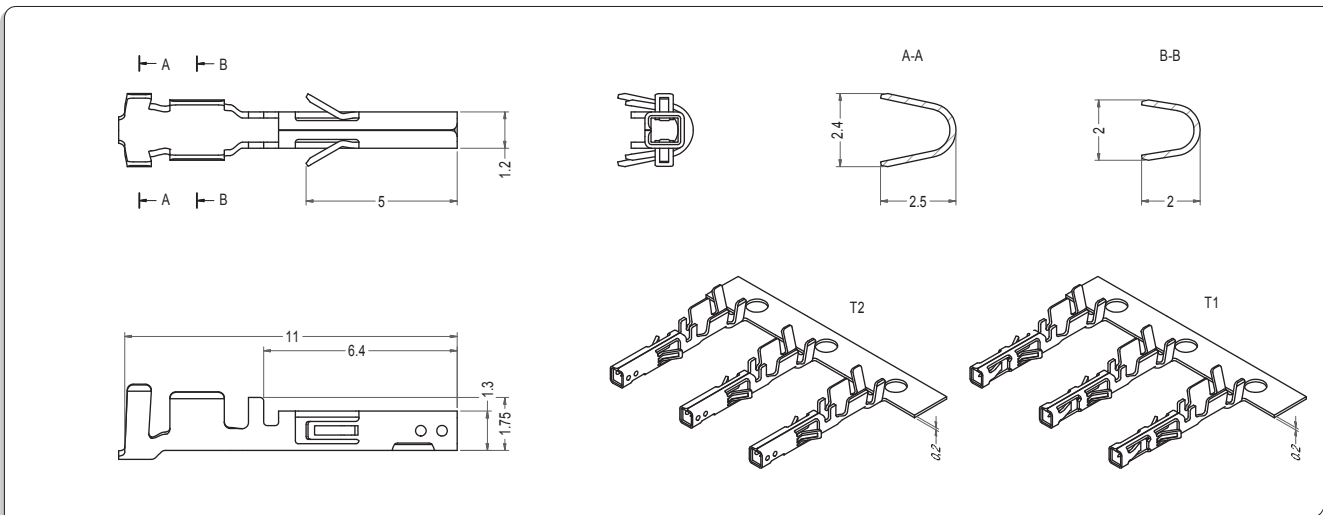

| Part No. | Section Area mm <sup>2</sup> | Wire Range     | Insulation O.D | Material        | Finish     | Qty/reel  |
|----------|------------------------------|----------------|----------------|-----------------|------------|-----------|
| RMFB-T2  | 0.22 to 0.52                 | AWG #24 to #20 | 1.2 to 1.9mm   | Phosphor bronze | Tin-plated | 10,000pcs |
| RMFB-T1  | 0.22 to 0.52                 | AWG #24 to #20 | 1.2 to 1.9mm   | Phosphor bronze | Tin-plated | 10,000pcs |



HOUSING

Material : Nylon 66 UL94V-0

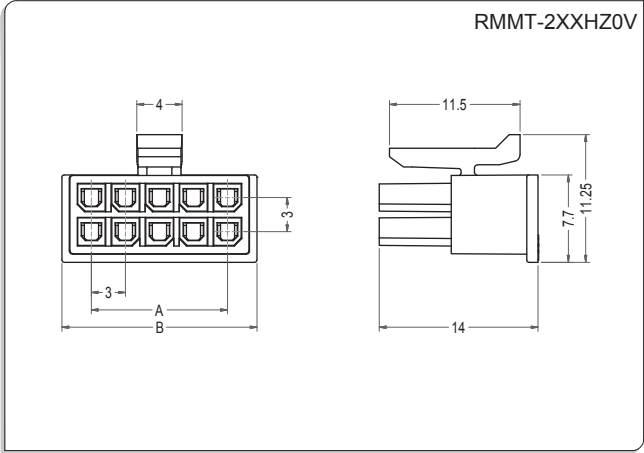


| Poles | Part No.     | DIM=A | DIM=B |
|-------|--------------|-------|-------|
| 2     | RMMT-201HZ0V |       | 5.20  |
| 4     | RMMT-202HZ0V | 3.00  | 8.20  |
|       | -- --        | -- -- | -- -- |
| 24    | RMMT-212HZ0V | 33.00 | 38.20 |
| 2     | RMFT-201HZ2V |       | 5.35  |
| 4     | RMFT-202HZ2V | 3.00  | 8.35  |
|       | -- --        | -- -- | -- -- |
| 24    | RMFT-212HZ2V | 33.00 | 38.35 |
| 2     | RMFT-201HZ0V |       | 5.35  |
| 4     | RMFT-202HZ0V | 3.00  | 8.35  |
|       | -- --        | -- -- | -- -- |
| 24    | RMFT-212HZ0V | 33.00 | 38.35 |

Material : Nylon 66 UL94V-0

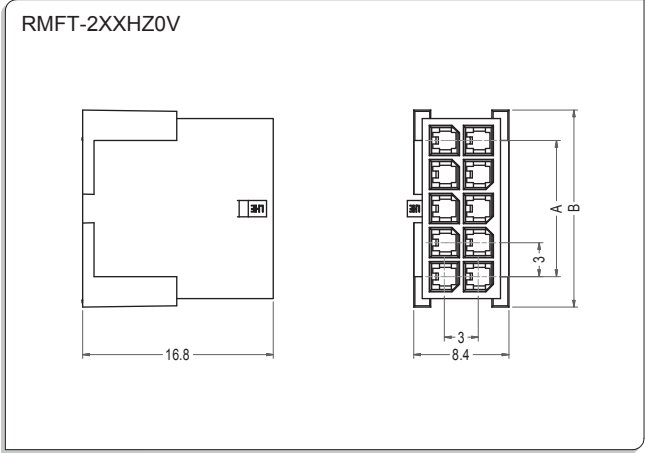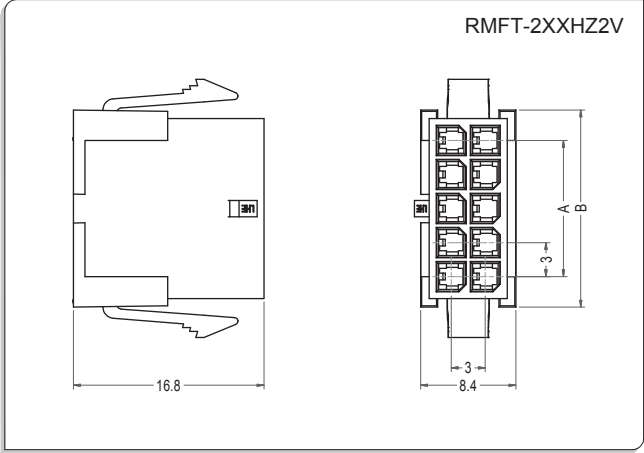

TERMINAL

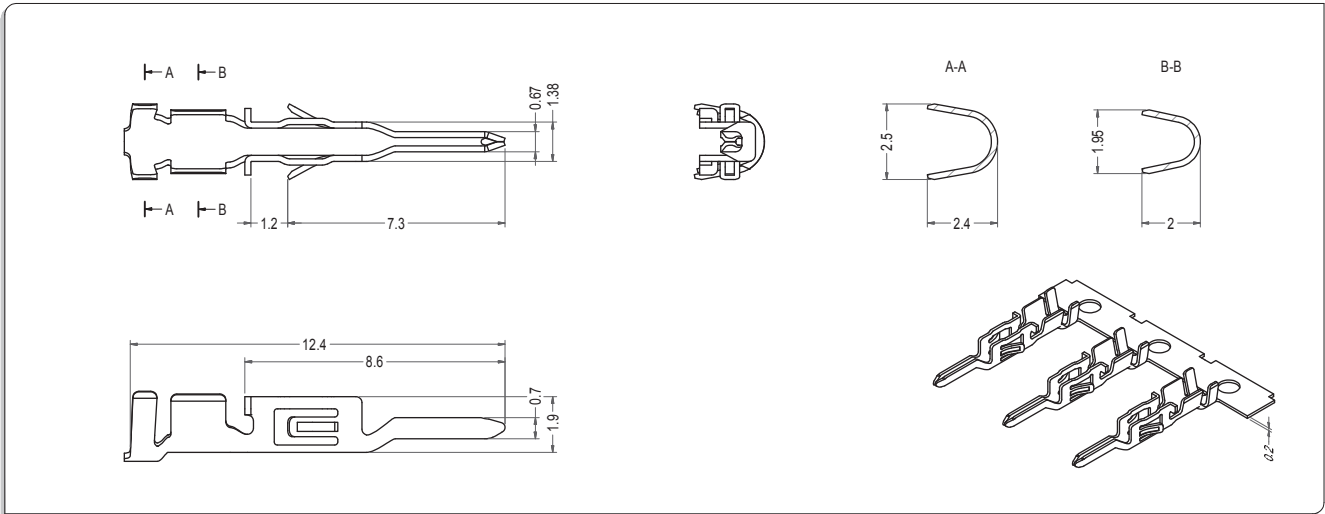

| Part No. | Section Area mm <sup>2</sup> | Wire Range     | Insulation O.D | Material        | Finish     | Qty/reel  |
|----------|------------------------------|----------------|----------------|-----------------|------------|-----------|
| RMMB-TT  | 0.22 to 0.52                 | AWG #24 to #20 | 1.2 to 1.9mm   | Phosphor bronze | Tin-plated | 10,000pcs |