

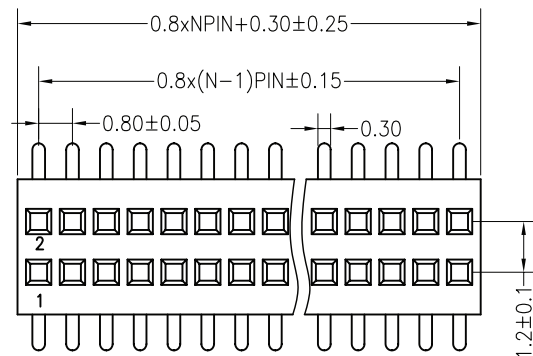
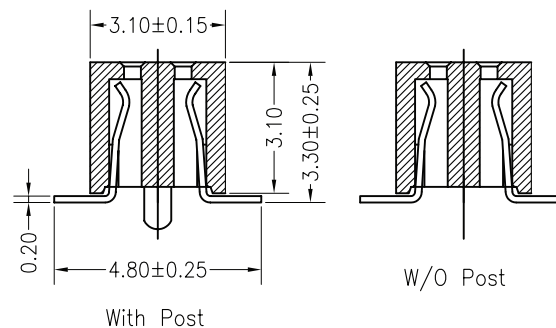


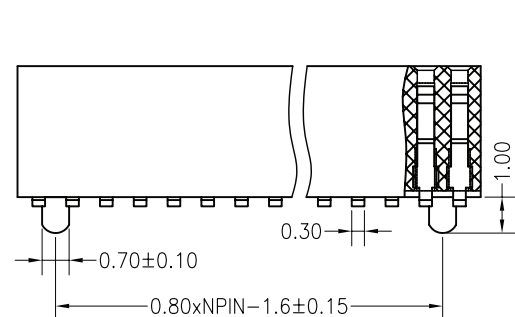

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

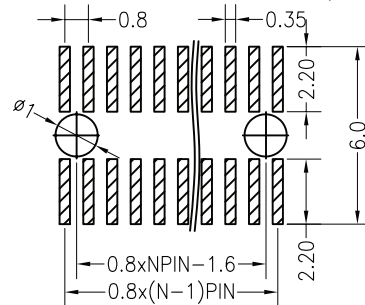

SPECIFICATIONS

Rated Current:0.75AMP

Contact Resistance:30mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Phosphor Bronze

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: LCP

Max.Processing Temp: 240°C for 30-60 seconds
(260°C for 10 seconds)

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	PACKAGE	SPECIAL
FH	080	2	XX	M [SMD straight]	F [flash gold]	033	00 [Standard]	T [tube]	0 [without Post]
								R [reel]	P [with Post]



euro-conn



CALUS
FILE N. E356435

UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

FEMALE HEADER