




SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

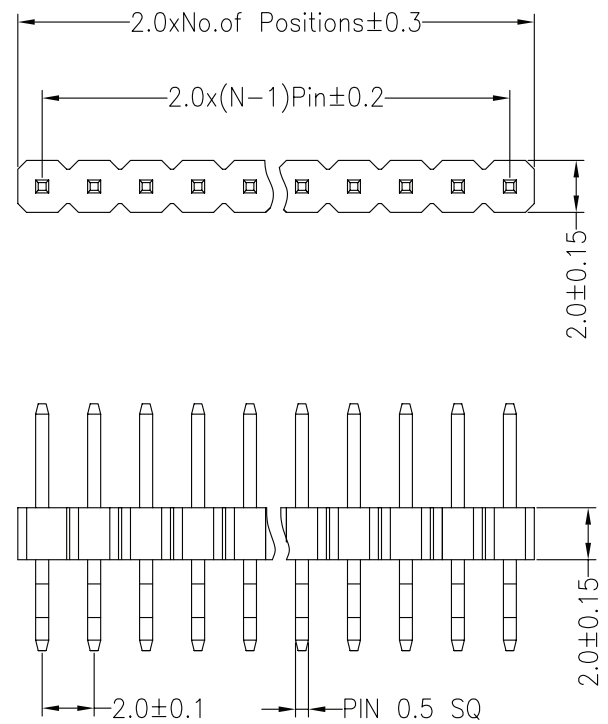

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

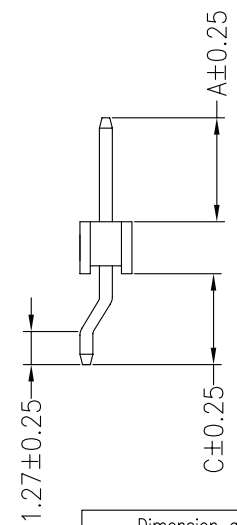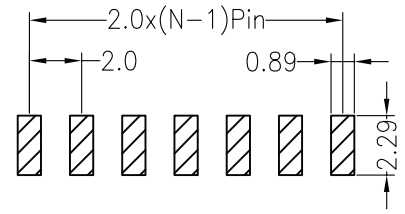

Dimension antitheses list		
ITEM	A	C
Standard	4.00	2.80
Alternate		

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	SP_code*	PCB LAYOUT	TYPE	PACKAGE
PH	200	1	XX	N [SMD right angle]	F [flash gold]	YYY	F [isol. 2,0]	--	0 [without PEG]	A	P [tube+caps] W [reel+caps] V [tray / bag] T [tube]
SP_code= Alternate customer										P [PEG from 6p]	