

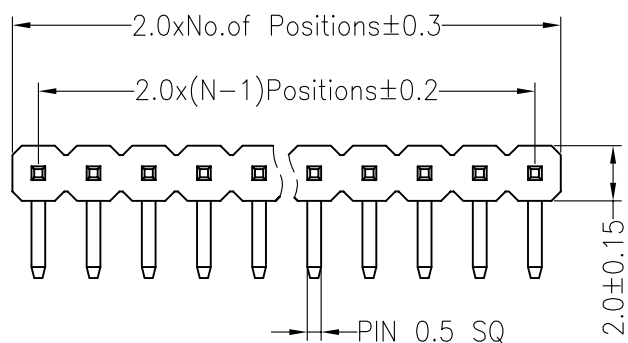
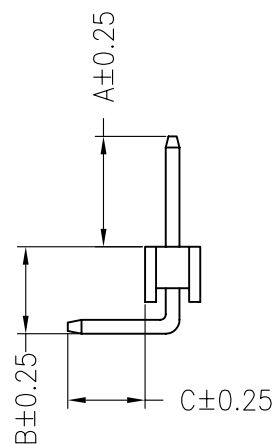


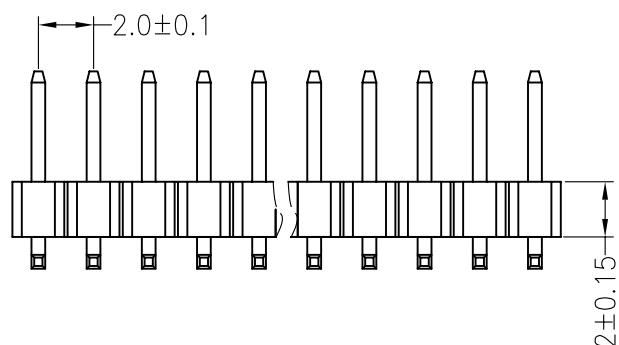

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

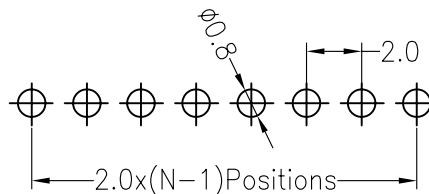

SPECIFICATIONS

Rated Current:2.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass Gold-Plated 25Cycles
Gold-Plated 5u 250Cycles

Contact Plating:Au or Sn Over Ni


Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

Dimension antitheses list			
ITEM	A	C	B
Standard	4.00	2.80	3.25
Alternate			

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT*	INSULATOR	SP_code*	PCB LAYOUT	SPECIAL	PACKAGE
PH	200	1	XX	R [right angle]	F [flash gold]	YYY [A]	F [height 2mm]	--	0 [standard]	0 [standard]	T [tube]
*SP_code=Alternate custom											V [tray / bag]
C [gold 5u]											



euro-conn



FILE N. E356435

UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50


> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

HEADER