

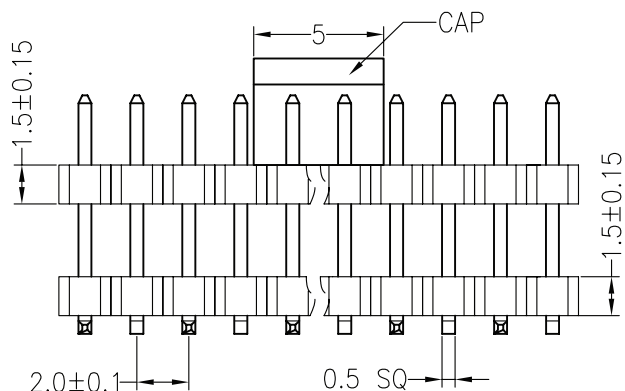
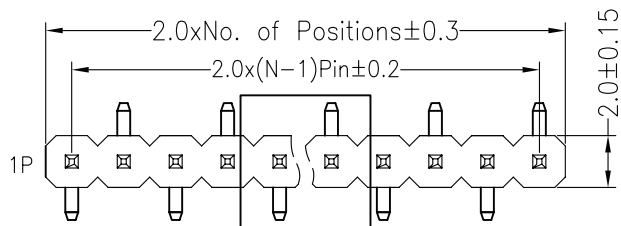
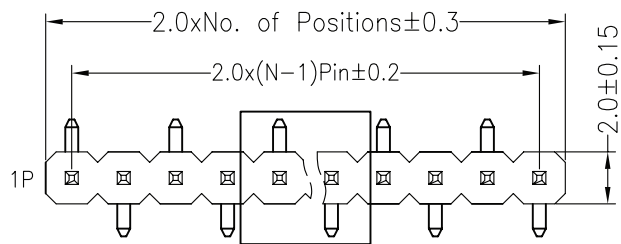
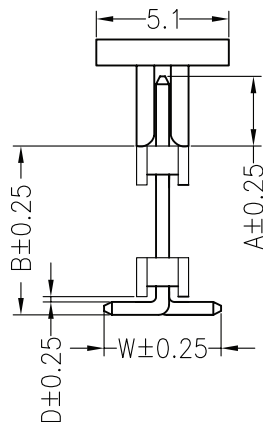


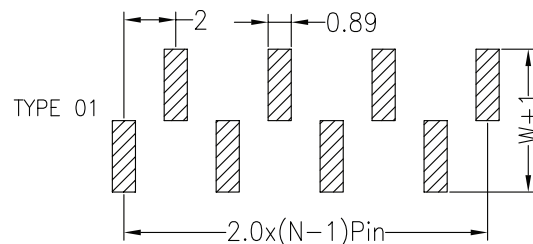

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

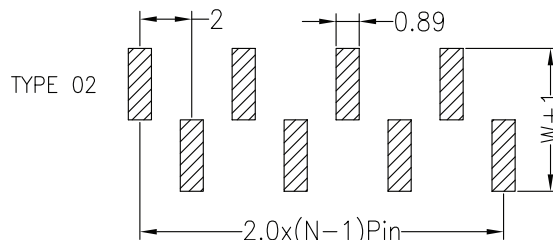

SPECIFICATIONS

Rated Current:2.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass Gold-Plated 25Cycles
Gold-Plated 5u 250Cycles

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

Dimension antitheses list					
ITEM	A	B	D	W	L
Standard	4.00	3.60	0.10	4.50	9.40
Alternate					

General description of ordering code

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	SP_CODE	OPTION	TYPE	PACKAGE
PH	200	1	XX	M (straight)	F (flash gold)	XXX (length A+B)	K (double insulat 1,5mm)	XX	0	1	T (tube)
					G (gold 10u)					2	W (reel+caps)
											V (tray)

*SP_code=Alternate custom



euro-conn



FILE N. E356435

UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

HEADER