

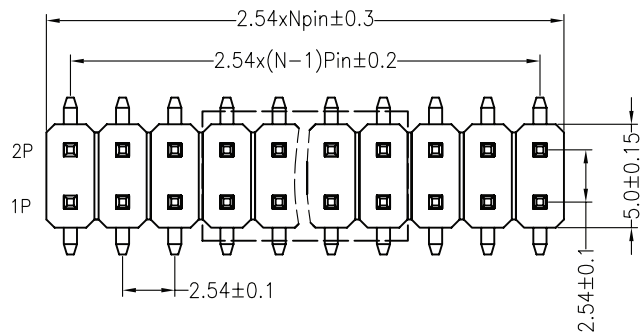
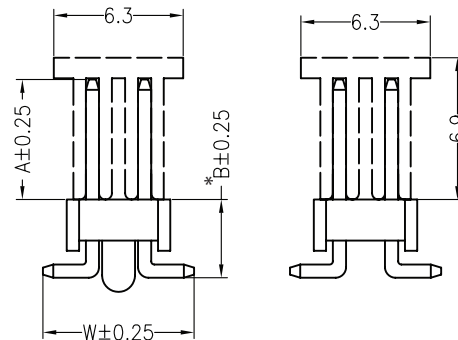


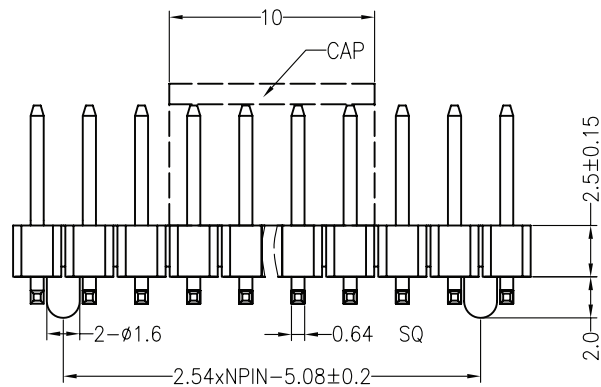

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

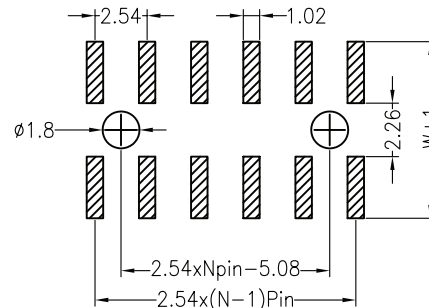

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

General description of ordering code

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	SP_CODE	POST	PACKAGE
PH	254	2	XX	M [straight SMT]	F [flash gold]	YYY [length A]	A [insulator 2,5]	--	00 [without]	T [tube]
*SP_code=Alternate custom					C [gold 5u]				P0 [with]	V [bag/tray]
					G [gold 10u]					W [reel +caps]

Dimension antitheses list			
ITEM	A	B	W
Standard	6.00	3.20	7.50
Alternate			



euro-conn



FILE N. E356435

UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50


> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

PIN HEADER