

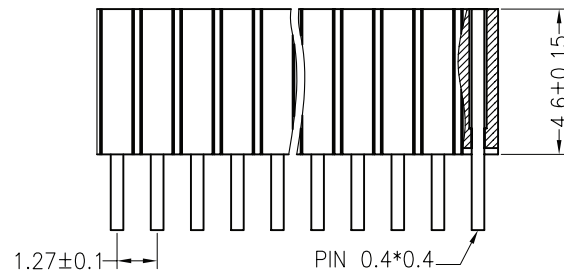
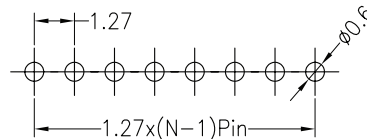


SPECIFICATIONS

Current Rating:	1 Amps
Withstanding Voltage:	AC 500V
Insulation Resistance:	1000M Ω Min
Contact Resistance:	20m Ω Max
Operation Temperature:	-40° to +105°
Insulator Material:	Polyester (UL94V-0)
Standard:	6T
Contact Material:	Brass
Contact Plating:	Au or SN over 50n" Ni
Max. Processing Temp:	230° C for 30-60 seconds (260° C for 5 seconds)

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

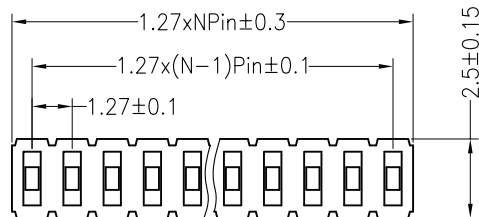

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	PACKAGE
FH	127	1	XX	D [straight]	F [flash gold]	046	01 [Standard]	T [tube]
					G [15u gold]			V [bag/tray]



euro-conn



CALUS
FILE N. E356435

UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

HEADER