

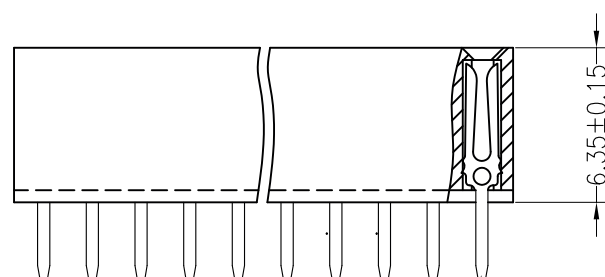


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

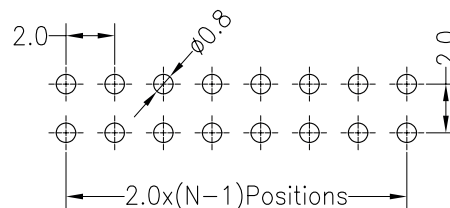

PIN 0.5x0.4



SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

General description of ordering code

FAMILY	PITCH	No.ROWS	POSITIONS	TYPE	PLATING	INSULATOR	OPTION1	OPTION2	PACKAGE
FH	200	2	XX	D [straight]	F [gold flash]	063	0	0	V [tray]
					G [gold 10u"]				T [tube]
									R [reel]



euro-conn



C_{UL} US
FILE N. E356435

UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

FEMALE HEADER