

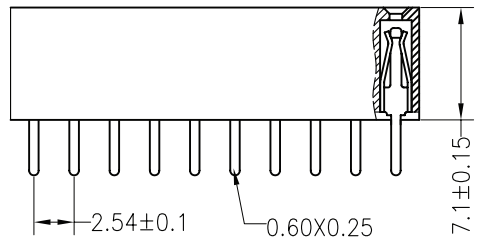
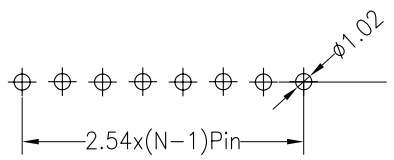


**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

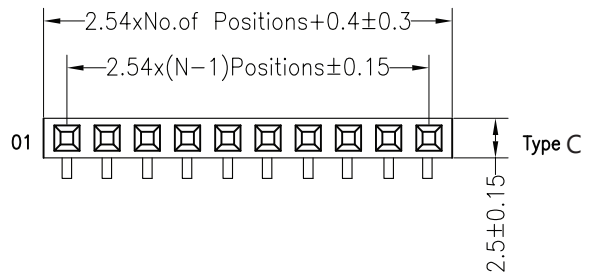

Type C

**General description of ordering code**


FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	PACKAGE	TYPE
<b>FH</b>	<b>254</b>	<b>1</b>	<b>XX</b>	<b>D</b> [straight]	<b>F</b> [flash gold]	<b>071</b>	<b>00</b> [Standard]	<b>T</b> [tube]	<b>A</b>
					<b>G</b> [gold 10u]			<b>V</b> [tray-]	<b>B</b>
									<b>C</b>



**euro-conn**



UNITS: mm		SHEET SIZE: ISO A4		SCALE:	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		



**HEADER**