


Operation Temperature: -40°C to +105°C

Max.Processing Temp: 230°C for 30–60 seconds  
(260°C for 10 seconds)

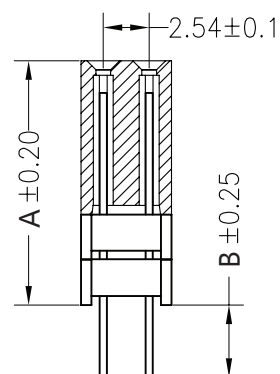

| Y  | A     | B     |
|----|-------|-------|
| 1A | 11,05 | 3,15  |
| 1B | 11,05 | 7,35  |
| 1C | 11,05 | 12,20 |
| 2B | 13,59 | 5,65  |
| 2C | 13,59 | 9,65  |
| 3A | 16,13 | 3,15  |
| 3C | 16,13 | 7,10  |
| 4A | 18,67 | 4,60  |

|           |            |          |             |                     |                       |            |                      |                            |                 |
|-----------|------------|----------|-------------|---------------------|-----------------------|------------|----------------------|----------------------------|-----------------|
| FAMILY    | PITCH      | N° ROWS  | N° PIN P.R. | VERSION             | CLIP PLATING          | HEIGHT     | OPTION               | OPTION1                    | PACKAGE         |
| <b>FH</b> | <b>254</b> | <b>2</b> | <b>XX</b>   | <b>D</b> [straight] | <b>F</b> [flash gold] | <b>085</b> | <b>Y</b> [see Chart] | <b>4</b> [pin mm 0,64x060] | <b>T</b> [tube] |

**G** [gold 15u]

