


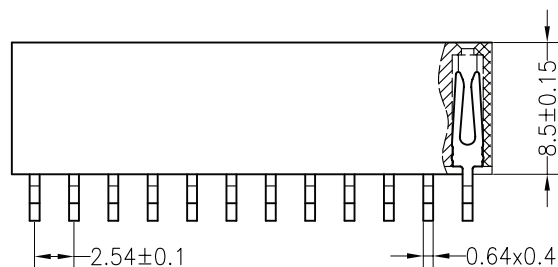




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

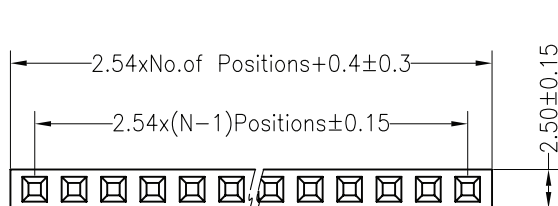

TYPE 1



TYPE 2

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20m Ω Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

General description of ordering code

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	PACKAGE	TYPE
FH	254	1	XX	N [right angle smt]	F [flash gold]	085	00 [standard]	T [tube]	A [type 1]
					C [gold 5u]			R [reel]	B [type 2]
					D [gold 10u]				
					G [gold 15u]				



euro-conn



US
FILE N. E356435

UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

FEMALE HEADER