


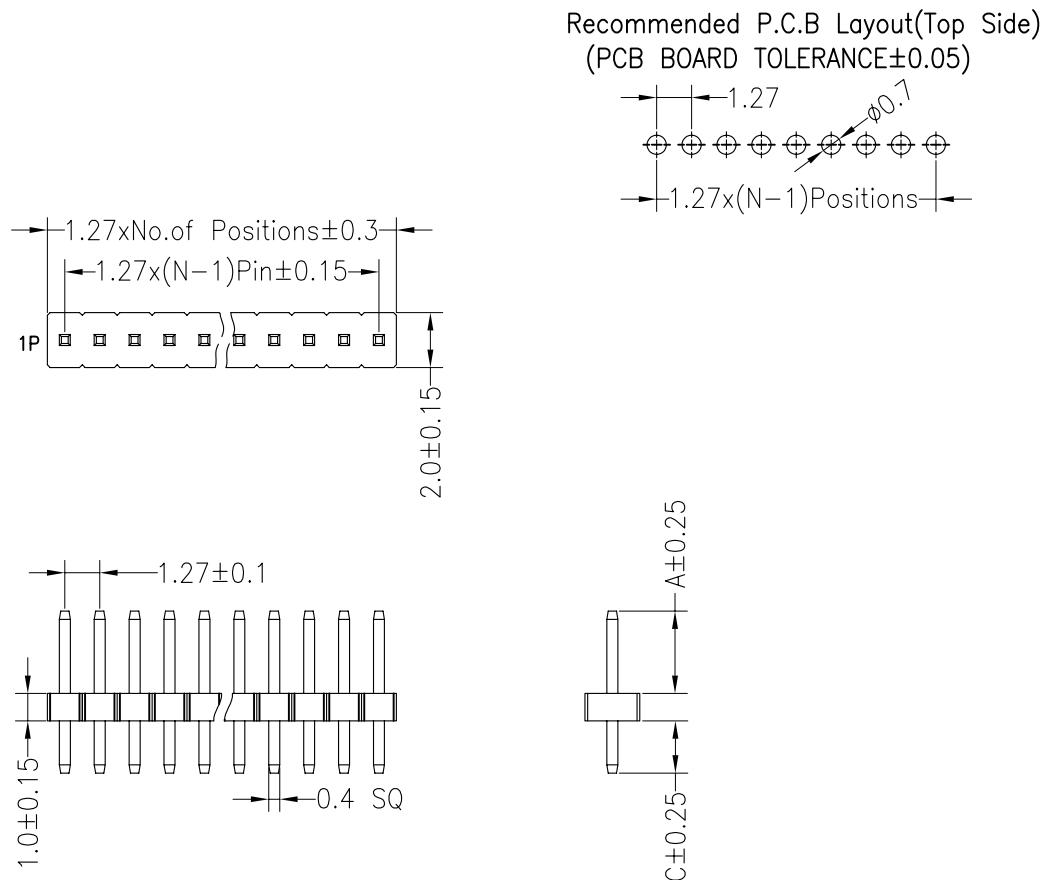

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20m Ω Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list		
ITEM	C	A
Standard	1.80	2.70
Alternate		

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	INSULATOR	SP_code*	PIN	SPECIAL	PACKAGE
PH	127	1	XX	D [straight]	F [flash gold]	YYY [A+C+1,00]	G [isol. 1,0]	--	0 [0,40 square]	0 [standard]	T [tube]
*SP_code=alternate custom											V [tray / bag]



euro-conn



CALUS
FILE N. E356435

UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projec on

HEADER