
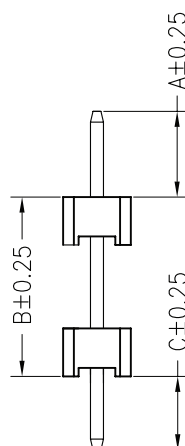
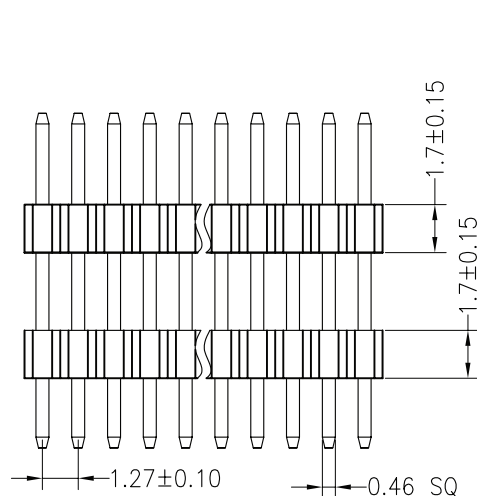


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

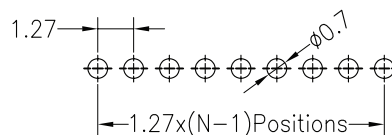

SPECIFICATIONS

Rated Current: 1.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulation Resistance: 1000MΩ Min

Operation Temperature: -40°C to +105°C

Contact Material: Brass

Contact Plating: Au or Sn Over Ni

Insulator Material: Polyester (UL94V-0)


Standard: PA6T

Max. Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list			
ITEM	A	C	B
Standard	1.80	2.70	
Alternate			

General description of ordering code

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	SP_CODE*	TYPE	SPECIAL	PACKAGE
PH	127	1	XX	D [straight]	F [flash gold]	XXX [length A+B+C]	H [double insulator 1,7]	XX	3 [insulator 1,7mm]	B [square 0,46]	T [tube]
SP_code=Alternate custom											V [bag/tray]



euro-conn



FILE N. E356435

UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

HEADER