
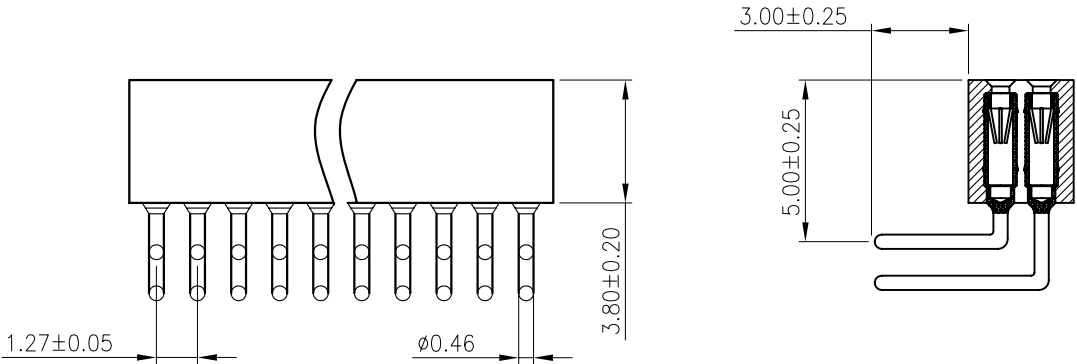


Technical Specs:

Insulator: Black glass filled polyester PCT- GF30-FR
Flammability: UL 94V-0
Sleeve: Brass (H59-3)
Contact clip(3 finger): Beryllium copper(C17300)
Accepted pin: Ø0.38 to 0.50mm
Forces: (polished steel gauge Ø0.41mm)
--Insertion 0.5 N typ
--Withdrawal 0.2 N typ
Mechanical life: min500 cycles
Rated current: 1A
Contact resistance: max 20mΩ
Dielectric resistance:Min 500V RMS

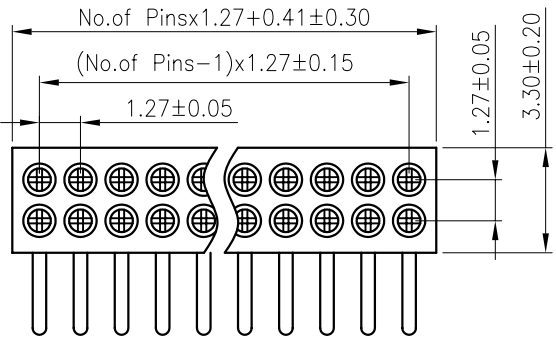

General description of ordering code

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	PACKAGE	SPECIAL
FH	127	- 2	XX	R [right angle]	F [flash gold]	038	00 [standard]	T [tube]	R [Round Pin]
T [tin]									



euro-conn



UNITS: mm		SHEET SIZE: ISO A4		SCALE: ----	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

MACHINE HEADER