



Technical Specs:


Insulator: Black glass filled polyester PCT- GF30-FR  
Flammability: UL 94V-0  
Sleeve: Brass (H59-3)  
Contact clip(3 finger): Beryllium copper(C17300)  
Accepted pin: Ø0.38 to 0.50mm  
Forces: (polished steel gauge Ø0.41mm)  
--Insertion 0.5 N typ  
--Withdrawal 0.2 N typ  
Mechanical life: min500 cycles  
Rated current: 1A  
Contact resistance: max 20mΩ  
Dielectric resistance:Min 500V RMS

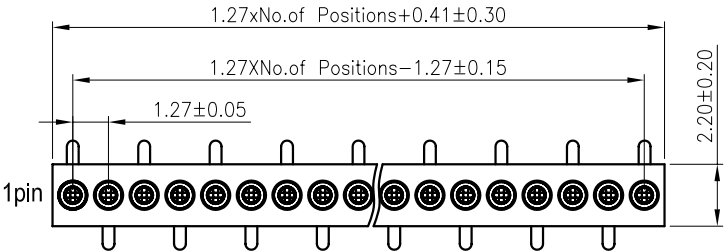

Type 2




Type 1





Type 2

Recommended P.C.B Layout

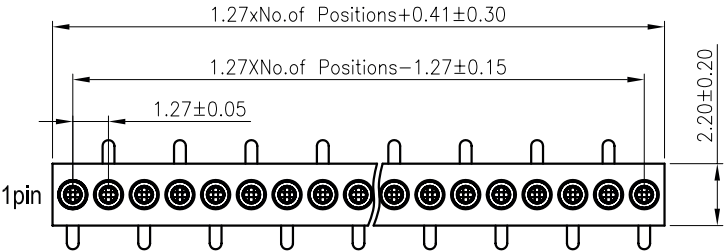

Type 1

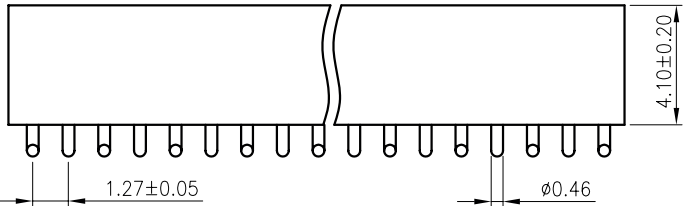

General description of ordering code

| FAMILY | PITCH | N° ROWS | N° PIN P.R. | VERSION          | CLIP PLATING   | HEIGHT | OPTION        | PACKAGE  | SPECIAL       |
|--------|-------|---------|-------------|------------------|----------------|--------|---------------|----------|---------------|
| FH     | 127   | 1       | XX          | M [smt straight] | F [flash gold] | 038    | 00 [standard] | T [tube] | R [Round Pin] |
|        |       |         |             |                  | T [tin]        |        |               |          |               |



euro-conn



| UNITS: mm |          | SHEET SIZE: ISO A4 |            | SCALE: ---- |  |
|-----------|----------|--------------------|------------|-------------|--|
| > 0 ~ 3   | > 3 ~ 18 | > 18 ~ 50          | > 50 ~ 120 |             |  |
| ± 0.12    | ± 0.15   | ± 0.3              | ± 0.5      |             |  |

! I prodotti e le caratteristiche possono cambiare senza preavviso.  
The products and their features may change without notice.

MACHINE HEADER