
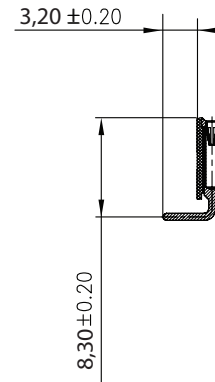
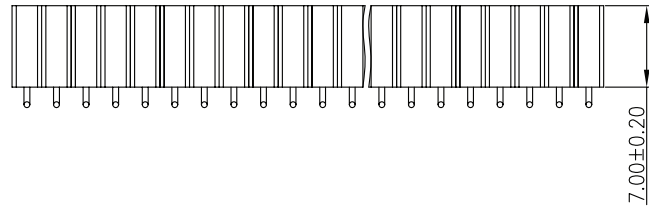


### Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR  
 Flammability: UL 94V-O  
 Sleeve: Brass  
 Contact clip(6 finger): Beryllium copper(C17200)  
 Accepted pin:  $\varnothing 0.70$  to  $0.90\text{mm}$ ,  $0.635\text{mm}$   
 Forces: (polished steel gauge  $\varnothing 0.76\text{mm}$ )  
 --Insertion 2 N typ  
 --Withdrawal 1 N typ  
 Mechanical life: min500 cycles  
 Rated current: 3A  
 Contact resistance: max  $10\text{m}\Omega$   
 Dielectric resistance: Min 1000V RMS

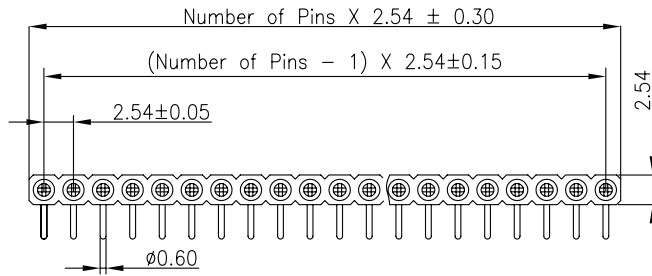

### General description of ordering code

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	PACKAGE	SPECIAL
<b>FH</b>	<b>254</b>	<b>1</b>	<b>XX</b>	<b>R</b> [right angle]	<b>F</b> [flash gold]	<b>070</b>	<b>00</b> [standard]	<b>T</b> [tube]	<b>R</b> [Round Pin]

**T** [tin]



**euro-conn**



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.  
The products and their features may change without notice.

**MACHINE HEADER**