

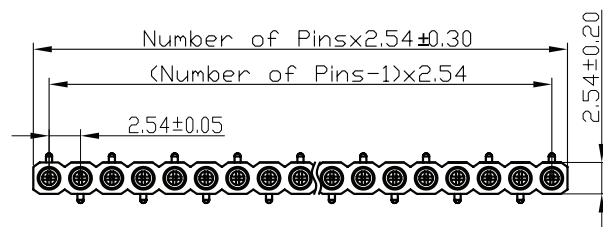


TYPE 1



TYPE 2

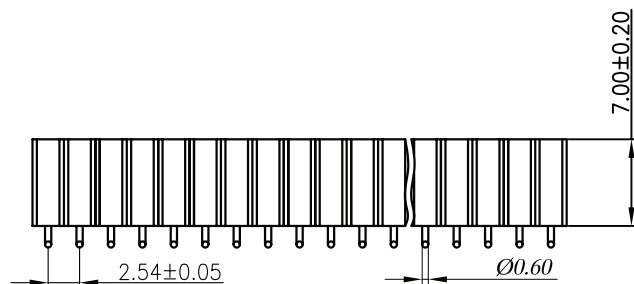

Technical Specs:

Insulator:	Black glass filled polyester PPS-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass
Contact clip(6 finger):	Beryllium copper(C17200)
Accepted pin:	Ø0.70 to 0.90mm,0.635mm
Forces:	(polished steel gauge Ø0.76mm)
--Insertion	2 N typ
--Withdrawal	1 N typ
Mechanical life:	min500 cycles
Rated current:	3A
Contact resistance:	max 10mΩ
Dielectric resistance:	Min 1000V RMS

General description of ordering code

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	TYPE	PACKAGE	SPECIAL
FH	254	1	XX	M [smt straight]	F [flash gold]	070	0	1	T [tube]	R [Round Pin]
					T [tin]					
					2					

T [tin]

2



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3
± 0.12

> 3 ~ 18
± 0.15

> 18 ~ 50
± 0.3

> 50 ~ 120
± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

MACHINE HEADER