

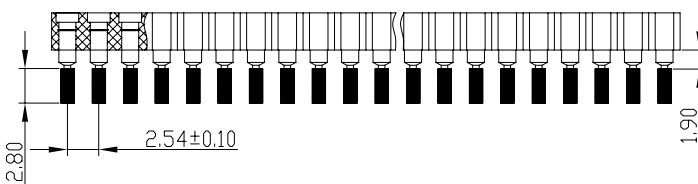


Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
Flammability: UL 94V-O
Sleeve: Brass CuZn36Pb3(C36000)
Contact clip(4 finger): Beryllium copper(C17200)
Accepted pin: Ø0.40 to 0.56mm
Forces: (polished steel gauge Ø0.43mm)
--Insertion 2 N typ
--Withdrawal 1 N typ
Mechanical life: min500 cycles
Rated current: 3A
Contact resistance: max 10mΩ
Dielectric resistance: Min 1000V RMS
Coplanarity SMD max 0.1 mm(measured on terminations: 25 mm long connectors)

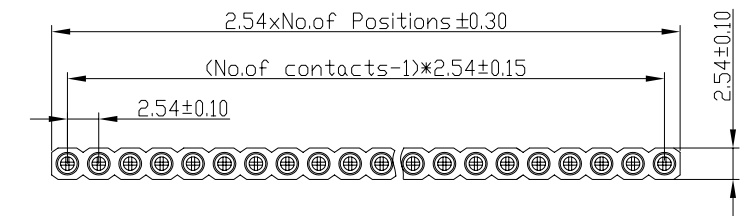

General description of ordering code

FAMILY	TYPE	PITCH	N° PIN PER ROW	VERSION	CLIP PLATING	PACKAGE
ZH	0 [single row 2,54]	254	XX [1 ≤ XX ≤ 36]	N	F [flash gold]	T [tube]
					T [tin]	R [reel w/ caps]