






TYPE 1

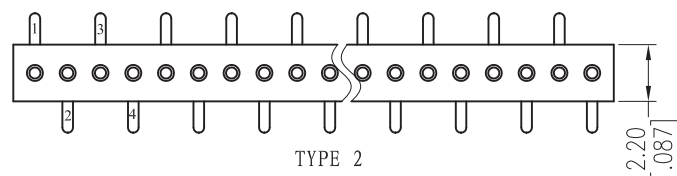

TYPE 2

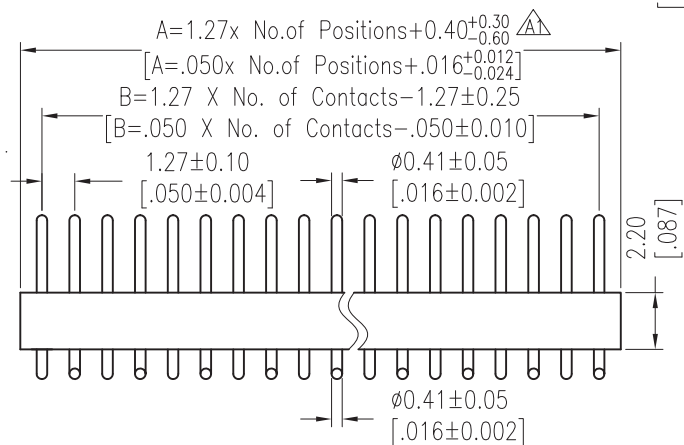

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE ± 0.05)

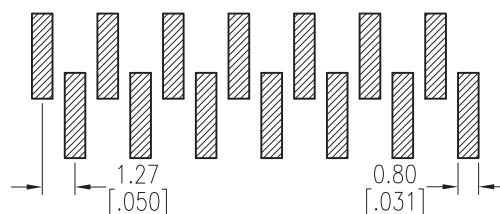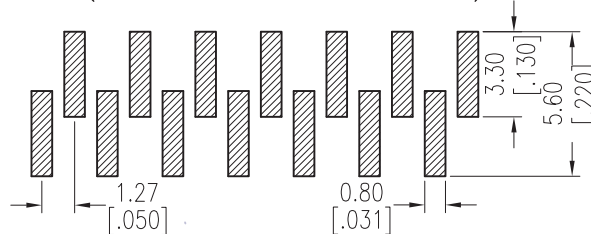

TECHNICAL SPECS:

Current Rating: 1.0AMP

Contact Resistance: 10mΩ Max

Dielectric Strength: Min 1000V_{RMS}

Mechanical Life: Min 500 cycles

Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)

Contact plating: Au over Ni

Connecting Pin: $\phi 0.41$ mm

Insulator Material: PPS+30%G.F(UL94V-0)

General description of ordering code

FAMILY	PITCH	N° ROWS	N° PIN	VERSION	CLIP PLATING	PIN HEIGHT	PIN DIAMETER	TYPE	PACKAGE
ZM	B (1,27mm)	1	XX	M	F (flash gold)	030	F [0,41 mm]	1	T [tube]
					T [tin]			2	V [tray]
					G [15u gold]				



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

MACHINE HEADER