
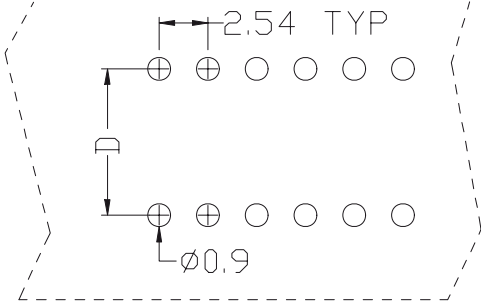
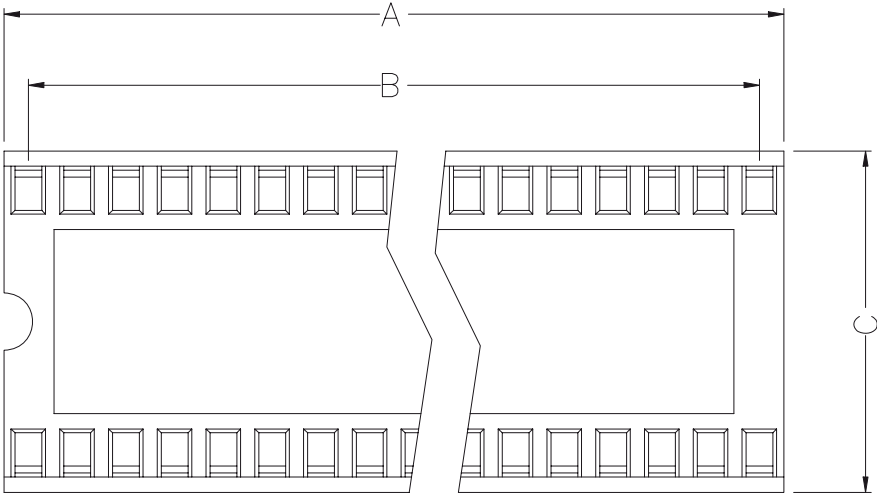
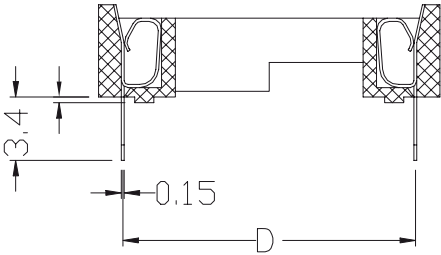


Electrical Characteristics:
Current Rating: 1 AMP
Insulator Resistance: 5000MΩmin. at DC 500V
Contact Resistance: 20mΩmax. at DC 100mA
Operating Temperature: -45°C~+105°C

Material:
Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Plating: Tin plated: 100u" over 50u" nickel

Features:
*IC Socket Strips - with screw machind pins

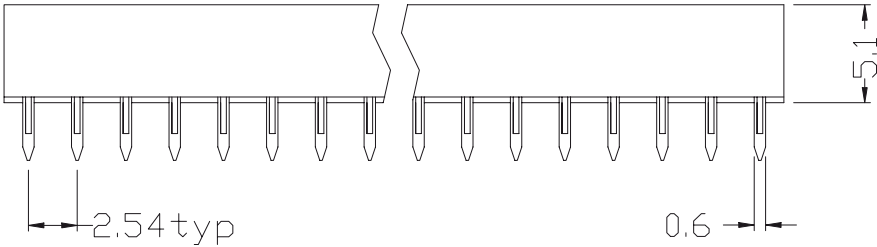


P.C.B Layout

General description of ordering code

FAMILY	TYPE	N° PIN	CLIP PLATING	PACKAGE
ZS	1 [double row 7,62] 2 [double row 10,16] 3 [double row 15,24]	XX [06 ≤ XX ≤ 64]	T [tin]	T [tube]

Dimension				
position	A	B	C	D
08	10.16	7.62	10.16	7.62
14	17.78	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	10.16	7.62
28	35.56	33.02	17.78	15.24
32	40.54	38.10	17.78	15.24
40	50.80	48.26	17.78	15.24
42	53.21	50.80	17.78	15.24
48	60.80	58.42	17.78	15.24



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE:---



First angle projection

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

IC-SOCKET