
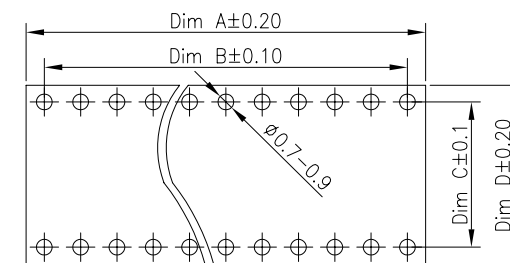


Contact	Dim A	Dim B	Dim C	Dim D
6	7.62	5.08	7.62	10.16
8	10.16	7.62	7.62	10.16
10	12.70	10.16	7.62	10.16
14	17.78	15.24	7.62	10.16
16	20.32	17.78	7.62	10.16
18	22.86	20.32	7.62	10.16
20	25.40	22.86	7.62	10.16
24	30.48	27.94	7.62	10.16
28	35.56	33.02	7.62	10.16
20	25.40	22.86	10.16	12.70
22	27.94	25.40	10.16	12.70
24	30.48	27.94	10.16	12.70
28	35.56	33.02	10.16	12.70
24	30.48	27.94	15.24	17.78
28	35.56	33.02	15.24	17.78
32	40.64	38.10	10.16	12.70
32	40.64	38.10	15.24	17.78
36	45.72	43.18	15.24	17.78
40	50.80	48.26	15.24	17.78
42	53.34	50.80	15.24	17.78
48	60.96	58.42	15.24	17.78
50	63.50	60.96	15.24	17.78
52	66.04	63.50	15.24	17.78
50	63.50	60.96	22.86	25.40
52	66.04	63.50	22.86	25.40
64	81.28	78.74	22.86	25.40

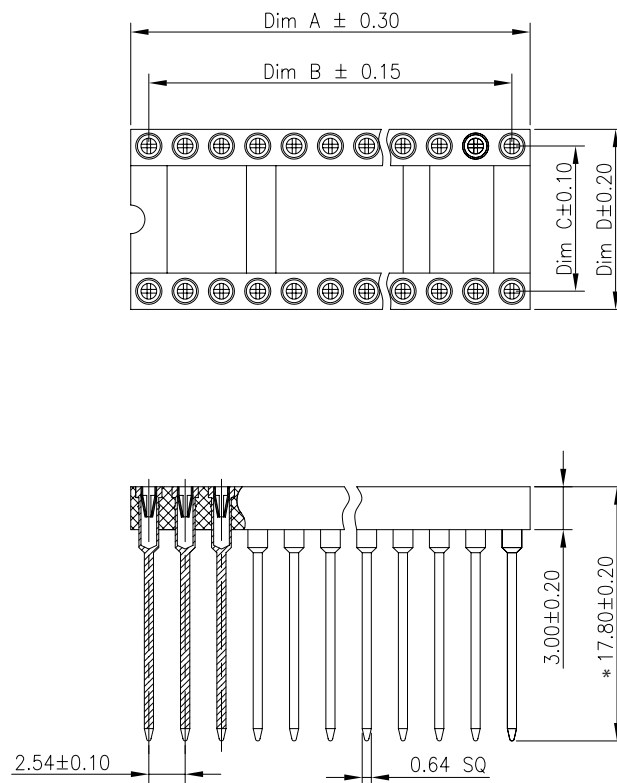

Materials

Pin (outer sleeve):Brass,machined, CuZn38Pb2

Clip(contac finger):Beryllium copper,heat treated

Plating(outer sleeve):

Tin plated :1.25u"m/50u"nickel,5um/200u"Tin

Gold plated:1.25u"m/50u"nickel,full gold

Plating clip(contact):1.25um/50 u"nickel,gold or tin plating

Insulator body(black):Glass filled thermoplastic polyester

MATERIAL:PBT UL94V-0

Electrical

Current rating:3 Amps/contact max.

Contact resistance:"20mΩ /contact

Insulation resistance:"1000M Ω

Operating voltage:60 AC/DC

General description of ordering code

FAMILY	TYPE	N° PIN	VERSION	CLIP PLATING	PACKAGE	HEIGHT *
ZH	1 [double row 7,62]	XX [6 ≤ XX ≤ 64]	D	F [flash gold]	T [tube]	178 [on demand]
	2 [double row 10,16]			T [tin]	V [tray]	
	3 [double row 15,24]					
	4 [double row 22,86]					



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE:---



First angle projection

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

IC-SOCKET