

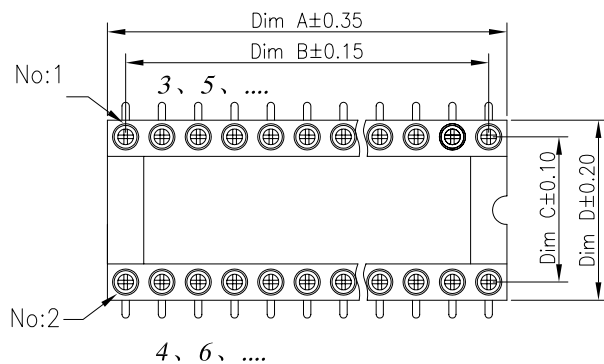


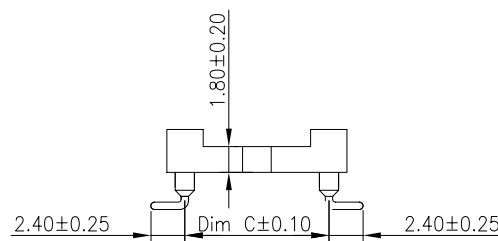

Technical Specs:

Insulator: Black glass filled polyester PBT-GF30-FR
Flammability: UL 94V-0
Sleeve: Brass
Contact clip(4/6 finger): Beryllium copper(C17200)
Accepted pin: Ø0.40 to 0.56mm
Forces: (polished steel gauge Ø0.43mm)
--Insertion 2 N typ
--Withdrawal 1 N typ
Mechanical life: min100 cycles
Rated current: 1A
Contact resistance: max 10mΩ
Dielectric resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

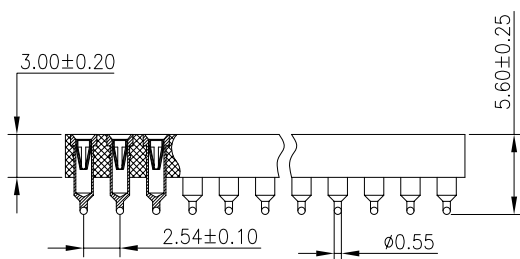

Contact	Dim A	Dim B	Dim C	Dim D
4	5.08	2.54	7.62	10.16
6	7.62	5.08	7.62	10.16
8	10.16	7.62	7.62	10.16
10	12.70	10.16	7.62	10.16
14	17.78	15.24	7.62	10.16
16	20.32	17.78	7.62	10.16
18	22.86	20.32	7.62	10.16
20	25.40	22.86	7.62	10.16
24	30.48	27.94	7.62	10.16
28	35.56	33.02	7.62	10.16
16	20.32	17.78	10.16	12.70
20	25.40	22.86	10.16	12.70
22	27.94	25.40	10.16	12.70
24	30.48	27.94	10.16	12.70
28	35.56	33.02	10.16	12.70
24	30.48	27.94	15.24	17.78
28	35.56	33.02	15.24	17.78
32	40.64	38.10	15.24	17.78
36	45.72	43.18	15.24	17.78
40	50.80	48.26	15.24	17.78
42	53.34	50.80	15.24	17.78
48	60.96	58.42	15.24	17.78
50	63.50	60.96	15.24	17.78
52	66.04	63.50	15.24	17.78
50	63.50	60.96	22.86	25.40
52	66.04	63.50	22.86	25.40
64	81.28	78.74	22.86	25.40

General description of ordering code

FAMILY	TYPE	N° PIN	VERSION	CLIP PLATING	PACKAGE
ZH	1 [double row 7,62]	XX [4 ≤ XX ≤ 64]	M	F [flash gold]	T [tube]
	2 [double row 10,16]			T [tin]	R [reel w/ caps]
	3 [double row 15,24]				
	4 [double row 22,86]				



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE:---



First angle projection

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

IC-SOCKET