

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min


Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PPS

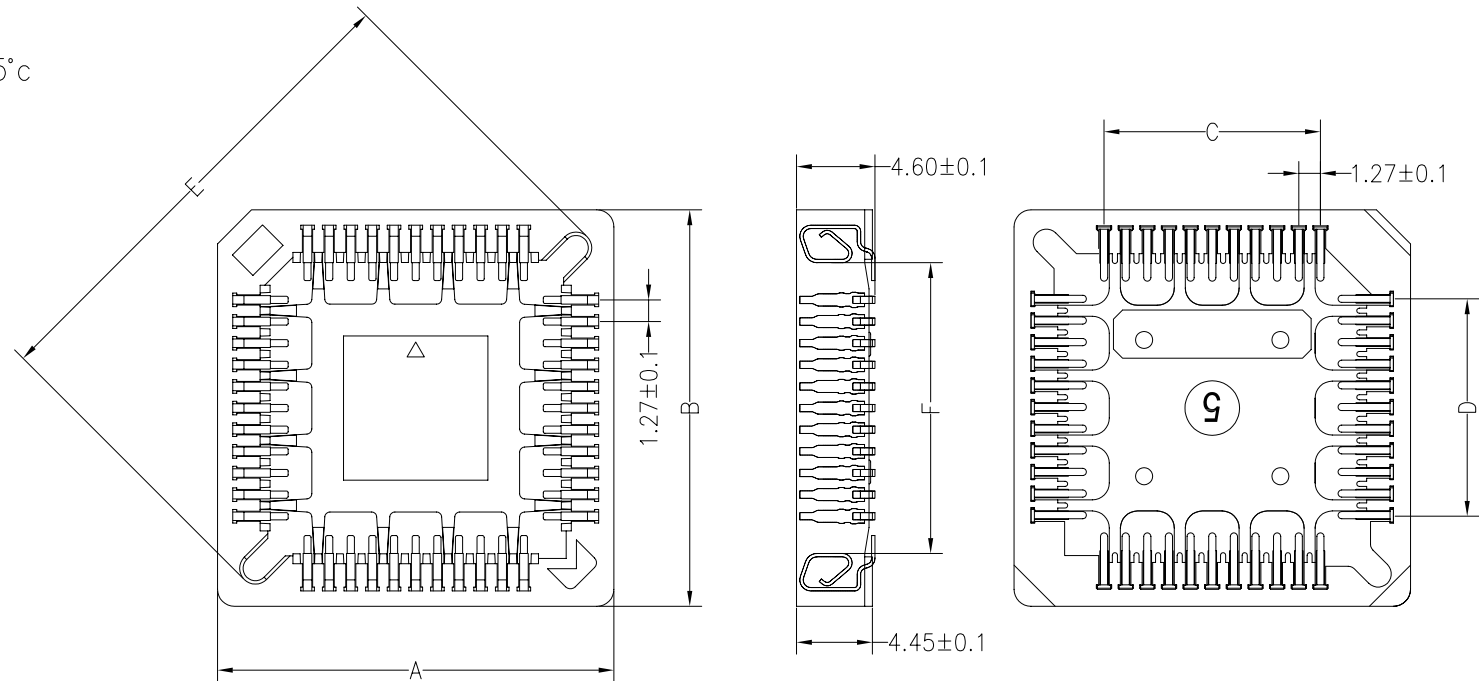

General description of ordering code

FAMILY	VERSION	N° PIN	HEIGHT	MATERIAL	PACKAGE
PL	M	-	S	P	T [tube]
		20			R [reel w/ caps]
		28			
		32			
		44			
		52			
		68			
		84			

	A±0.2	B±0.2	C±0.2	D±0.2	E±0.2	F±0.2
SMT-20P	15.65	15.65	5.08	5.08	17.28	9.36
SMT-28P	18.19	18.19	7.62	7.62	20.87	12.00
SMT-32P	18.15	20.65	7.62	10.16	22.50	14.40
SMT-44P	23.27	23.27	12.70	12.70	28.30	16.99
SMT-52P	25.81	25.81	15.24	15.24	31.65	19.54
SMT-68P	30.89	30.89	20.32	20.32	38.83	24.62
SMT-84P	35.97	35.97	25.40	25.40	46.00	29.70




euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE:---



First angle projection

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

IC-SOCKET