

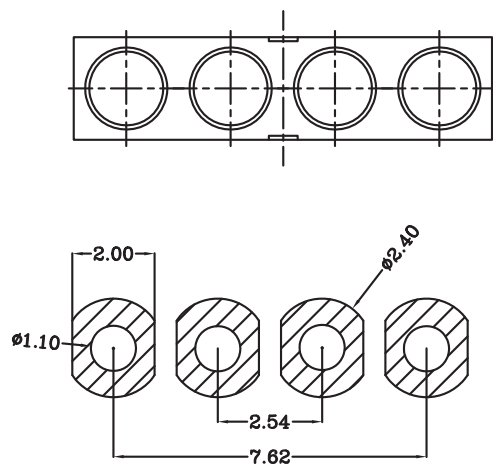



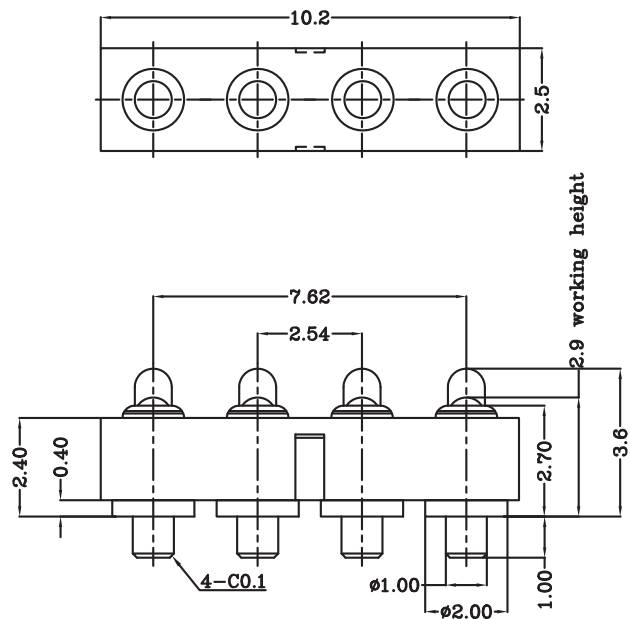

Recommended PCB Layout

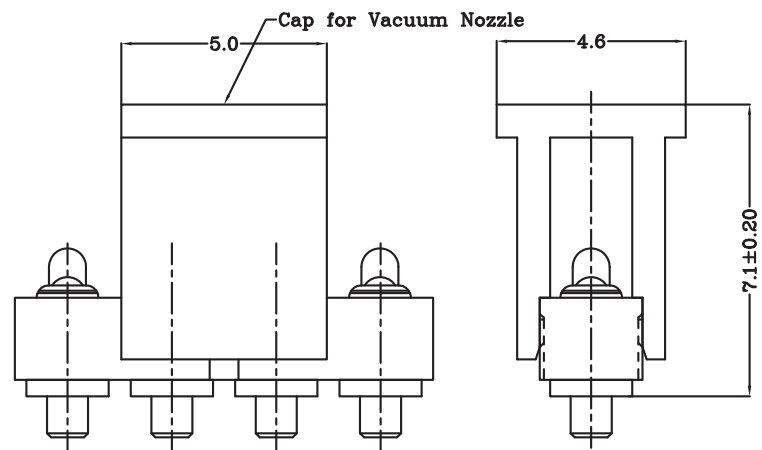

Notes:

- 1 Material :
Housing: HTN, UL94 V-0 Color Black.
Contact: Brass
Spring :Stainless steel wire
- 2 Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical:
Total stroke : 0.80mm
Durability : 10,000 cycle min.
- 4 Electrical
Contact resistance : 30mOhm Max.
Voltage rating : 36V DC Max
Current rating : 2.0A



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE:---



First angle projection

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

EC-254052T401