


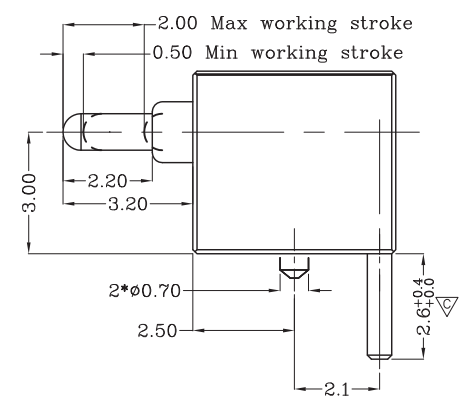
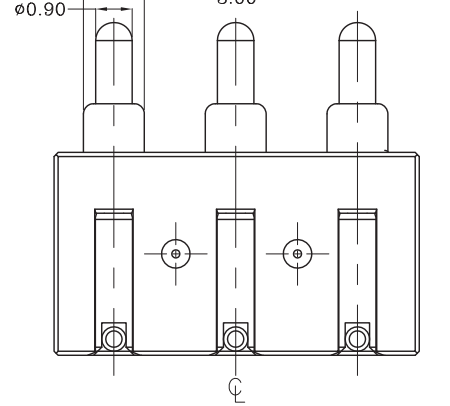
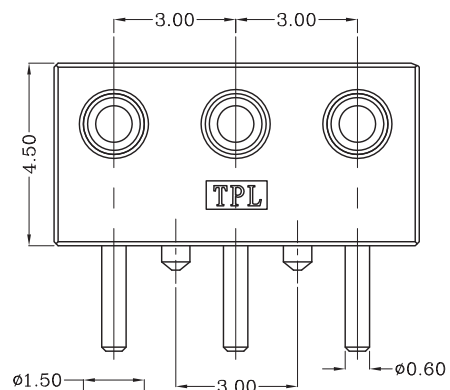
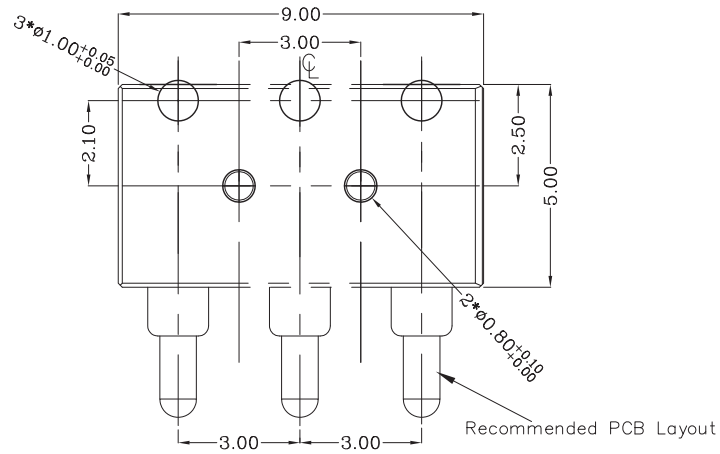
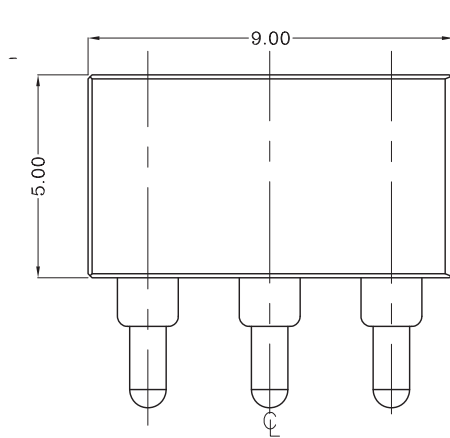




Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5				

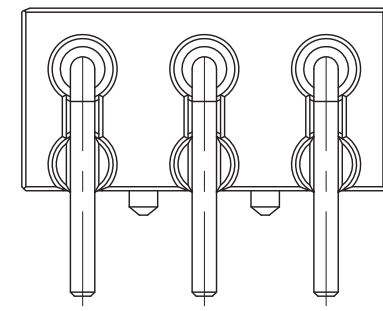

- Notes:
- 1 Demensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 <2.2>Warning:Working stroke are not permitted to be more than Max working stroke.
 - 3 Electrical performance
 Resistance: 50mOhm Max.
 Current rating: 1.0A
 - 4 RoHS compliant.

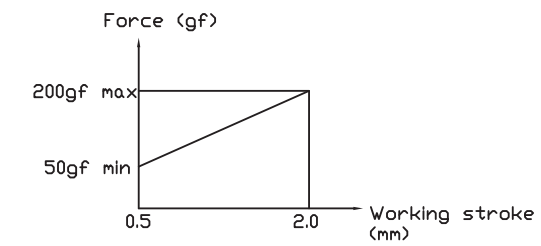

euro-conn



UNITS: mm		SHEET SIZE: ISO A4		SCALE:---		First angle projection
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120			
± 0.12	± 0.15	± 0.3	± 0.5			

EC-30001024T301