
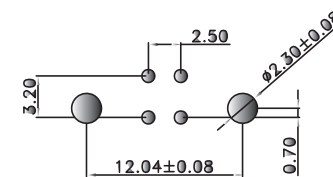


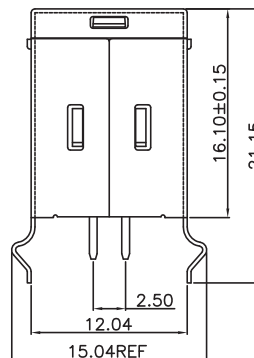



1. Material:
Housing: PBT: Black; Thermoplastics,UL94V-0;
Contact: Copper Alloy
Shell: Copper Alloy
2. FINISH:
Contact: Gold Flash Plated on Contact Area,
80u" Tin Plated on Solder Tails,
50u" Min.Nickel Underplating Over All.
Shell: 50u" Min.Nickel Underplating Over All.
3. Specification:
3.1: Voltage Current Rating: 1.5Amp. 30V/AC
3.2: Electrical:
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 30mΩ Max.
Dielectric Withstanding Voltage: 500V/AC 1Minute
3.3: MECHANICAL
Mating force: 35N Max.
Unmating force:10N Min.
Durability: 1500 cycles Min.



RECOMMENDED P.C.B. PATTERN LAYOUT

PN: USB-B04DFFN1

rev01= aggiunta caratteristiche tecniche18/01/21



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

Rev. n.01
01/18/2021

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

USB 2.0