

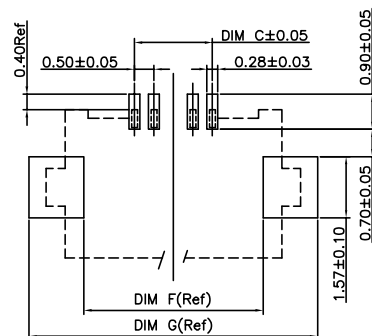




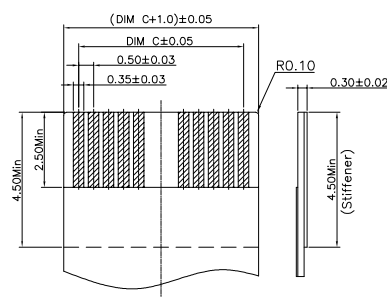


NOTES:

1. MATERIAL:
1.1 CARRY TAPE:HIPS,T=0.30±0.05mm,CLEAR
1.2 REEL:HIPS,
1.3 SHIM:PE,CLEAR.
2. PRIMARY PACKING:3000PCS/REEL.
3. SECONDARY PACKING:SEE PACKING LIST
4. PEELING RESISTANCE: 0.1~0.7N(10~70gf); PEELING
ANGLE: 165°~180°; PEELING SPEED: 300mm/minutes.

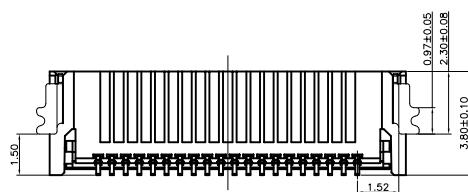

NO. OF POS.	A	B	C	PCS/REI
4~8 PIN	16.0	↘	7.5	3000
9~24 PIN	24.0	↘	11.5	3000
25~34 PIN	32.0	28.4	14.2	3000
35~56 PIN	44.0	40.4	20.2	3000
57~60 PIN	56.0	52.4	26.2	3000

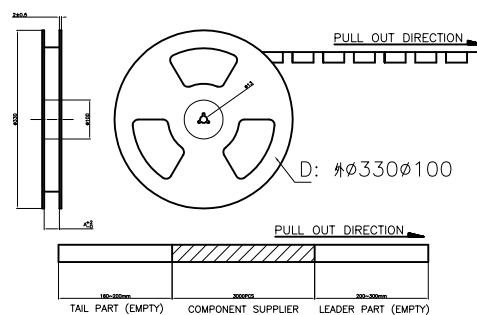

FAMILY	PITCH	TYPE	N° PIN	VERSION	PLATING	OPTION	OPTION1	PACKAGE
FPZ	050	-	T1	XX	N [smt right angle]	T [gold flash]	0 [standard]	N [standard]
								T [tube] R [reel]

PERFORMANCE:

- .1: CURRENT RATING: 0.5A/PIN.
- .2: VOLTAGE RATING: 50V (AC/DC).
- .3: CONTACT RESISTANCE: INITIAL VALUE 30mOHM Max,
- .4: INSULATION RESISTANCE: 500MOHM Min.
- .5: DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1MINUTE;
- .6: DURABILITY: 20 TIMES Min.
- .7: OPERATING TEMPERATURE: - 40°C ~ +85°C
OPERATING HUMIDITY RANGE: 20% TO 85%

4	STATOR	BRASS		2
3	TERMINAL	PHOSPHOR BRONZE		POSITION:
2	COVER	THERMOPLASTIC UL94V-0	BLACK	1
1	HOUSING	THERMOPLASTIC UL94V-0	NATURAL	1
NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

Zif Connector



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

Rev. n.02*
04/04/2019

prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.