


HOUSING:LCP UL 94V-0
ACTUATOR:LCP UL 94V-0
CONTACTS:COPPER ALLOY
PEG: COPPER ALLOY

CONTACTS:GOLD FLASH OVER NICKEL
PEG:TIN OVER NICKEL


OPERATING VOLTAGE:50V AC,DC
CURRENT RATING:0.3A AC,DC
OPERATING TEMPERATURE:-25C~+85C

No. of Contacts	DIM.		
	A	B	C
08	3.50	8.92	4.50
10	4.50	9.92	5.50
20	9.50	14.92	10.50
24	11.50	16.92	12.50
28	13.50	18.92	14.50
30	14.50	19.92	15.50
40	19.50	24.92	20.50
50	24.50	29.92	25.50
60	29.50	34.92	30.50
66	32.50	37.92	33.50







REEL Dim

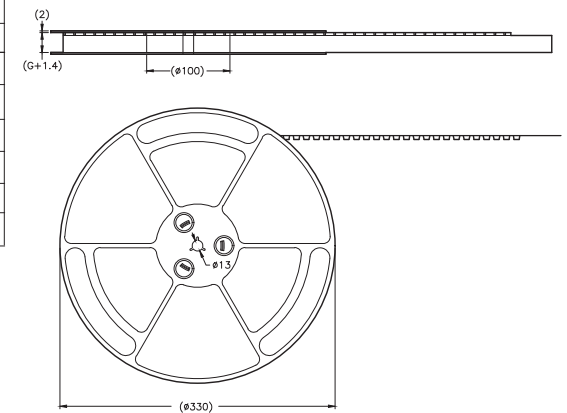

Tape width 32 and 56 mm




Tape width 16 and 24 mm

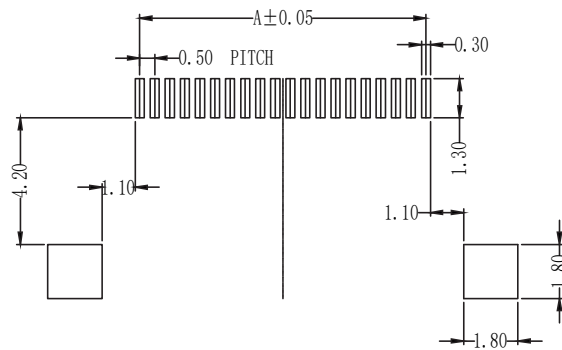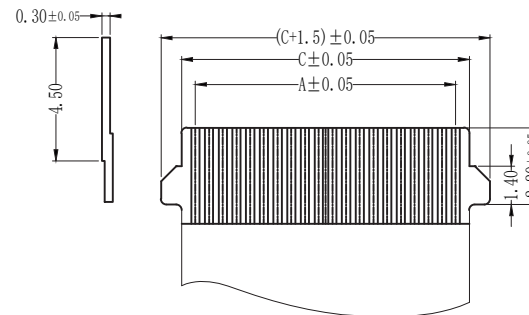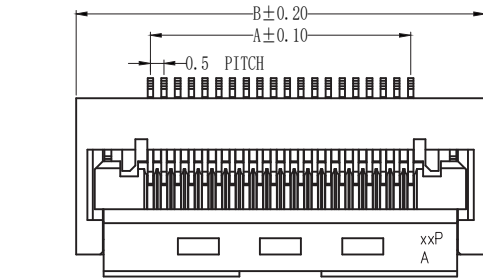

General description of ordering code

FAMILY	PITCH	TYPE	N° PIN	VERSION	PLATING	OPTION	OPTION1	PACKAGE
FPZ	050	TH	XX	N (smt right angle)	G (gold flash)	0 [standard]	N [standard]	T (tube)
					T [TIN]			R (reel)

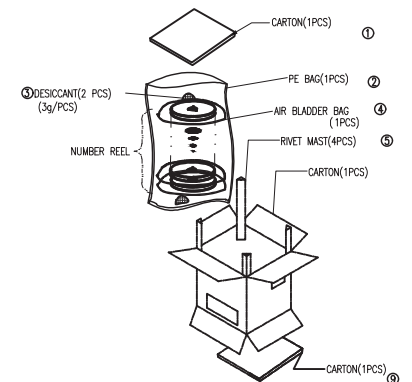

Notes:

- 1.Component load per 13" reel:1500 Pcs
- 2.Material : Black Conductive Polystyrene Alloy.
- 3.Thickness : 0.3±0.05mm
- 4.All dimensions meet EIA-481-C requirements.

No. of	DIM.				
Contacts	A	B	C	REEL (CARTON)	SUM (PCS)
4pin~8pin	16	7.5	—	15	22500
10pin~24pin	24	11.5	—	10	15000
25pin~35pin	32	14.2	28.4	8	12000
36pin~50pin	44	20.2	40.4	6	9000
51pin~66pin	56	26.25	52.5	5	7500



euro-conn



UNITS: mm		SHEET SIZE: ISO A4	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

Rev. n.00
22/05/2019

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

Zif Connector