

Material:

Housing: LCP UL94V-0
Contact: Phosphor Bronze
Plating: Tin Plated Over Nickel

Electrical Characteristics:

Rated current: 0.4A
Rated voltage: 50V
Withstand voltage: 200V
Contact resistance: $\leq 20\text{m}\Omega$
Insulation resistance: 500M Ω
Operating Temperature: -20 To +85

Pins	A	B	C	D
2	1.00	3.10	6.85	8.15
3	2.00	4.10	7.85	9.15
4	3.00	5.10	8.85	10.15
5	4.00	6.10	9.85	11.15
6	5.00	7.10	10.85	12.15
7	6.00	8.10	11.85	13.15
8	7.00	9.10	12.85	14.15
9	8.00	10.10	13.85	15.15
10	9.00	11.10	14.85	16.15
11	10.00	12.10	15.85	17.15
12	11.00	13.10	16.85	18.15
13	12.00	14.10	17.85	19.15
14	13.00	15.10	18.85	20.15
15	14.00	16.10	19.85	21.15
16	15.00	17.10	20.85	22.15
17	16.00	18.10	21.85	23.15
18	17.00	19.10	22.85	24.15
19	18.00	20.10	23.85	25.15
20	19.00	21.10	24.85	26.15
21	20.00	22.10	25.85	27.15
22	21.00	23.10	26.85	28.15
23	22.00	24.10	27.85	29.15
24	23.00	25.10	28.85	30.15
25	24.00	26.10	29.85	31.15
26	25.00	27.10	30.85	32.15
27	26.00	28.10	31.85	33.15
28	27.00	29.10	32.85	34.15
29	28.00	30.10	33.85	35.15
30	29.00	31.10	34.85	36.15

Come Ordinare

No. Pin

FPZ100

A

XX


MBN

T



Tubo

R

Bobina

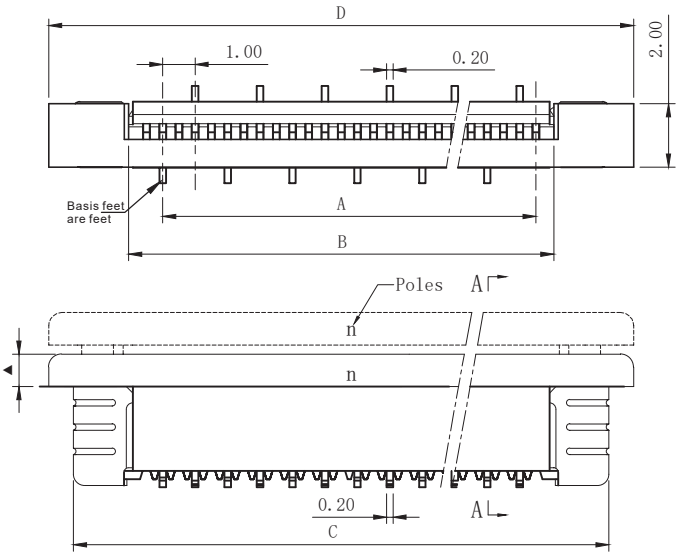

Note: "▼" size
2Pin~14Pin: 1.50mm;
15Pin~19Pin: 1.60mm;
20Pin~30Pin: 1.70mm;
Note: "■" size
2Pin~14Pin: 4.70mm;
15Pin~19Pin: 4.80mm;
20Pin~30Pin: 4.90mm;

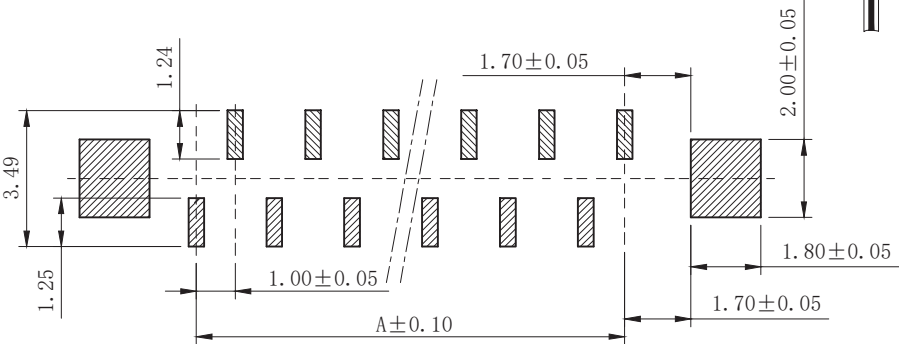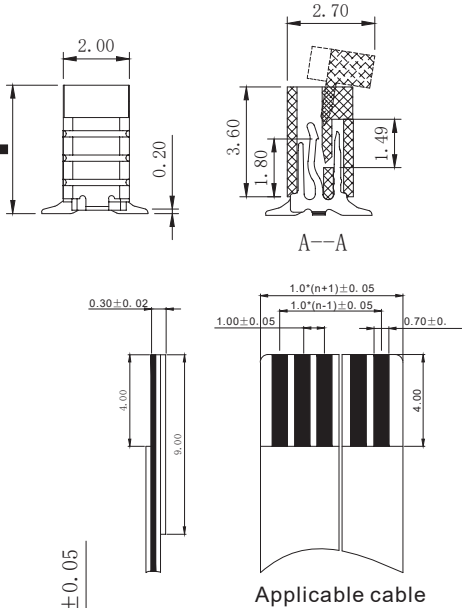

PCB Layout



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

ZIF CONNECTOR