

## Material:

Housing: PA46 Black UL94V-0

Contact: Phosphor Bronze

Plating: Tin Plated Over Gilded

## Electrical characteristics:

Voltage rating: 50 VAC

Current rating: 0.5 AMP


Dielectric Withstanding Voltage: 500 VAC R.M.S.

Insulation resistance: 800M ohm

Contact resistance: 30m ohm

Temperature range: -20°C To +85°C

| Pin | A     | B     | C     | D     |
|-----|-------|-------|-------|-------|
| 4   | 3.00  | 5.30  | 11.10 | 10.10 |
| 5   | 4.00  | 6.30  | 12.10 | 11.10 |
| 6   | 5.00  | 7.30  | 13.10 | 12.10 |
| 7   | 6.00  | 8.30  | 14.10 | 13.10 |
| 8   | 7.00  | 9.30  | 15.10 | 14.10 |
| 9   | 8.00  | 10.30 | 16.10 | 15.10 |
| 10  | 9.00  | 11.30 | 17.10 | 16.10 |
| 11  | 10.00 | 12.30 | 18.10 | 17.10 |
| 12  | 11.00 | 13.30 | 19.10 | 18.10 |
| 13  | 12.00 | 14.30 | 20.10 | 19.10 |
| 14  | 13.00 | 15.30 | 21.10 | 20.10 |
| 15  | 14.00 | 16.30 | 22.10 | 21.10 |
| 16  | 15.00 | 17.30 | 23.10 | 22.10 |
| 17  | 16.00 | 18.30 | 24.10 | 23.10 |
| 18  | 17.00 | 19.30 | 25.10 | 24.10 |
| 19  | 18.00 | 20.30 | 26.10 | 25.10 |
| 20  | 19.00 | 21.30 | 27.10 | 26.10 |
| 21  | 20.00 | 22.30 | 28.10 | 27.10 |
| 22  | 21.00 | 23.30 | 29.10 | 28.10 |
| 23  | 22.00 | 24.30 | 30.10 | 29.10 |
| 24  | 23.00 | 25.30 | 31.10 | 30.10 |
| 25  | 24.00 | 26.30 | 32.10 | 31.10 |
| 26  | 25.00 | 27.30 | 33.10 | 32.10 |
| 27  | 26.00 | 28.30 | 34.10 | 33.10 |
| 28  | 27.00 | 29.30 | 35.10 | 34.10 |
| 29  | 28.00 | 30.30 | 36.10 | 35.10 |
| 30  | 29.00 | 31.30 | 37.10 | 36.10 |
| 31  | 30.00 | 32.30 | 38.10 | 37.10 |
| 32  | 31.00 | 33.30 | 39.10 | 38.10 |
| 33  | 32.00 | 34.30 | 40.10 | 39.10 |
| 34  | 33.00 | 35.30 | 41.10 | 40.10 |
| 35  | 34.00 | 36.30 | 42.10 | 41.10 |

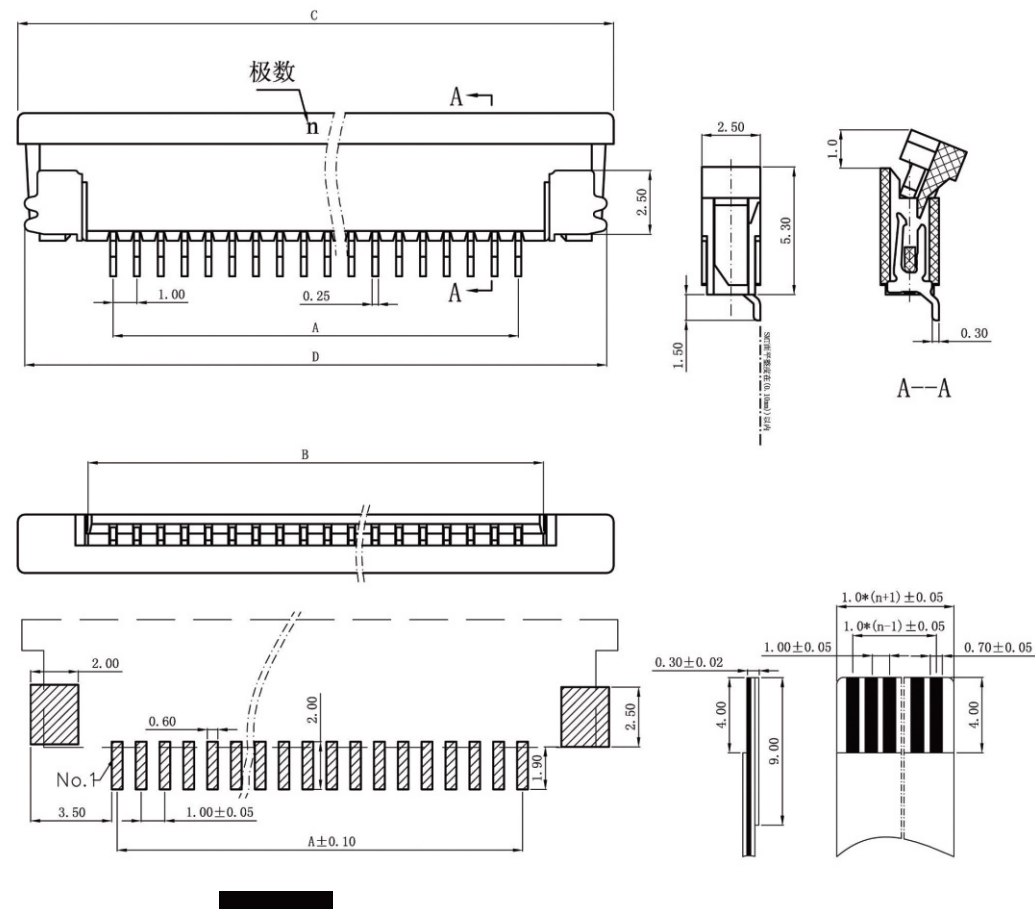

Come Ordinare

|        |   |    |    |   |   |      |   |   |        |   |        |
|--------|---|----|----|---|---|------|---|---|--------|---|--------|
| FPZ100 | - | B0 | XX | N | T | Tin  | 0 | B | Bottom | T | Tubo   |
|        |   |    |    |   | G | Gold |   | U | Upper  | R | Bobina |



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.  
The products and their features may change without notice.

**ZIF CONNECTOR**