




EURO - SEAL




4.0mm Automotive Connector Male

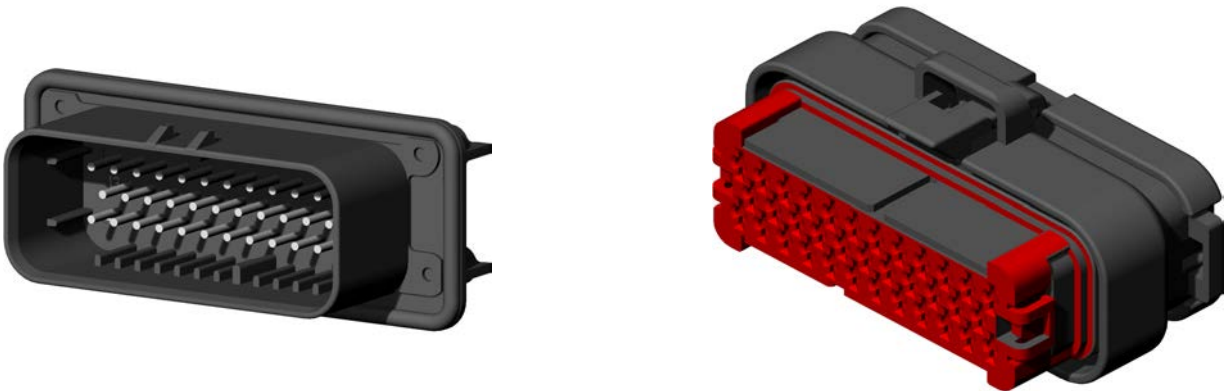




SPECIFICATIONS

Current Rating:5.0~8.0AMP
Contact Resistance:10mΩ Max
Insulation Resistance:5000MΩ Min
Withstand Voltage:1000V AC/Minute
Operation Temperature:-40℃ to +105℃
Contact Material:Copper Alloy
Contact Plating:Sn Over Ni
Insulator Material:Polyester (UL94V-0)
Standard:PBT


MALE 23 Positions

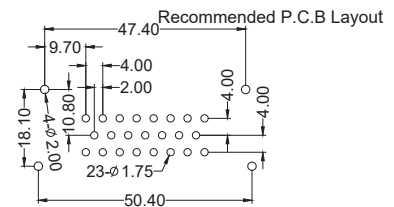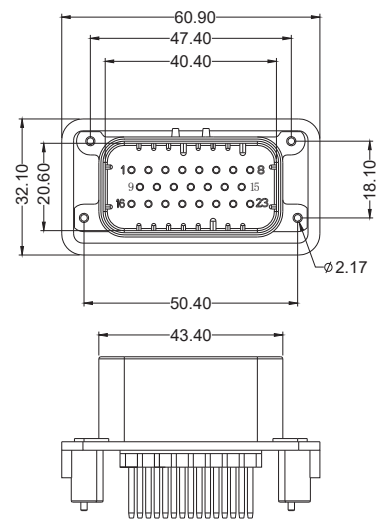


STRAIGHT

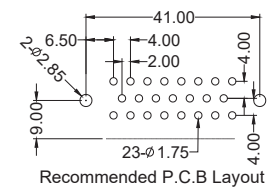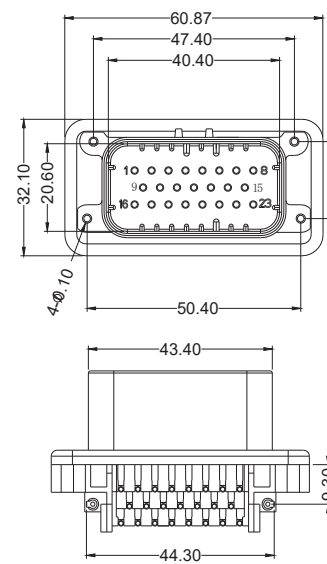

R/A ANGLE

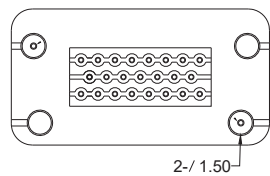


KEYING PCB



BLACK

straight - ESP-B23D1TS
R/A - ESP-B23R1TS



GRAY

straight - ESP-G23D1TS
R/A - ESP-G23R1TS



euro-conn




UNITS: mm		SHEET SIZE: ISO A4	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.


Euro-Seal

Current Rating:5.0~8.0AMP
Contact Resistance:10mΩ Max
Insulation Resistance:5000MΩ Min
Withstand Voltage:1000V AC/Minute
Operation Temperature:-40℃ to +105℃
Contact Material:Copper Alloy
Contact Plating:Sn Over Ni
Insulator Material:Polyester (UL94V-0)
Standard:PBT


35 Positions

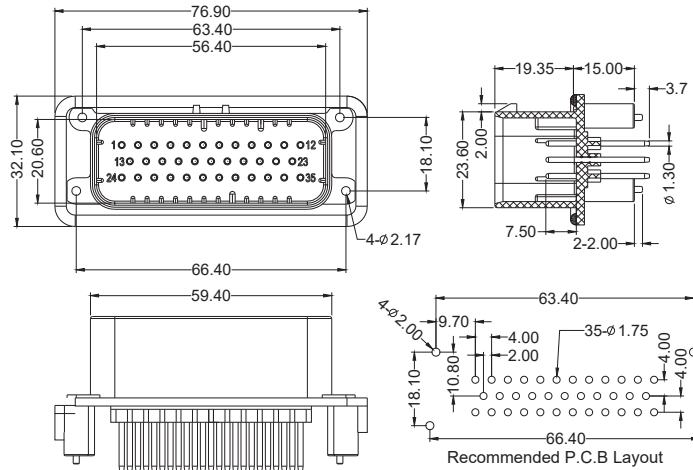


STRAIGHT

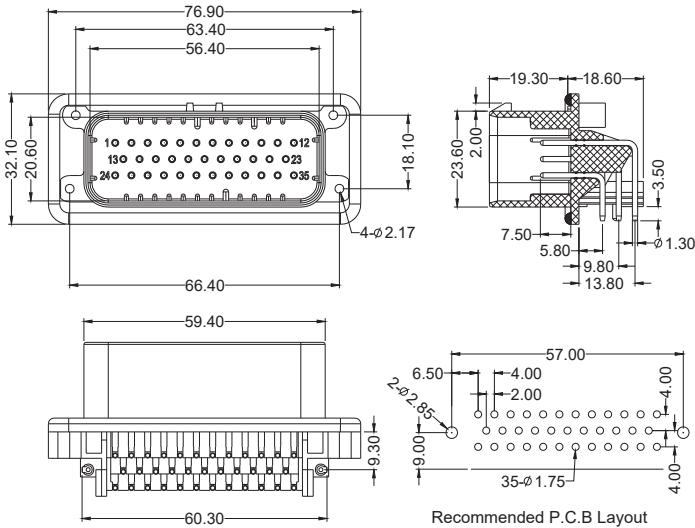


R/A ANGLE

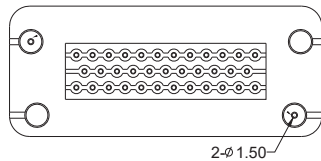

KEYING PCB



BLACK



GRAY

straight - ESP-B35D1TS
R/A - ESP-B35R1TS

straight - ESP-G35D1TS
R/A - ESP-G35R1TS



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.






Euro-Seal

Current Rating:5.0~8.0AMP
Contact Resistance:10mΩ Max
Insulation Resistance:5000MΩ Min
Withstand Voltage:1000V AC/Minute
Operation Temperature:-40℃ to +105℃
Contact Material:Copper Alloy
Contact Plating:Sn Over Ni
Insulator Material:Polyester (UL94V-0)
Standard:PBT


FEMALE

8 positions


14 positions

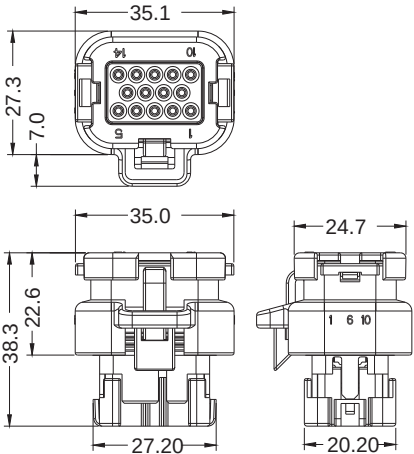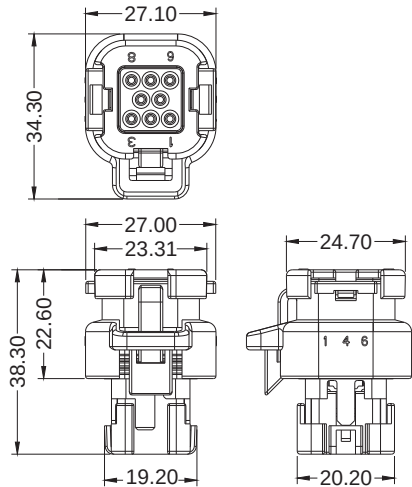

FemaleTerminal

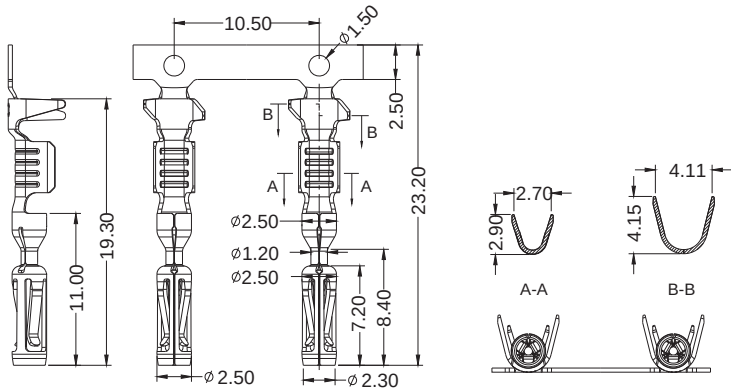

ETT-FT1620



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3



± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

Euro-Seal


Current Rating:5.0~8.0AMP
Contact Resistance:10mΩ Max
Insulation Resistance:5000MΩ Min
Withstand Voltage:1000V AC/Minute
Operation Temperature:-40℃ to +105℃
Contact Material:Copper Alloy
Contact Plating:Sn Over Ni
Insulator Material:Polyester (UL94V-0)
Standard:PBT

23 Positions

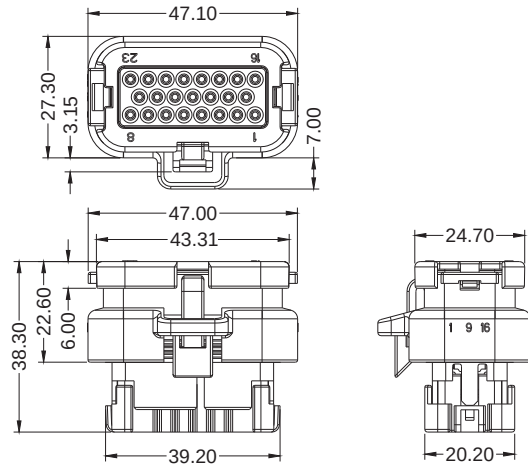

BLACK



ESS-B23H10



GRAY


ESS-G23H10

35 Positions

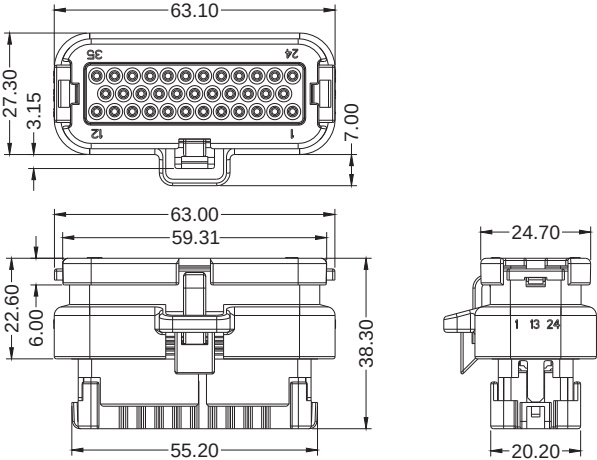

BLACK

ESS-B35H10



GRAY

ESS-G35H10



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

Euro-Seal