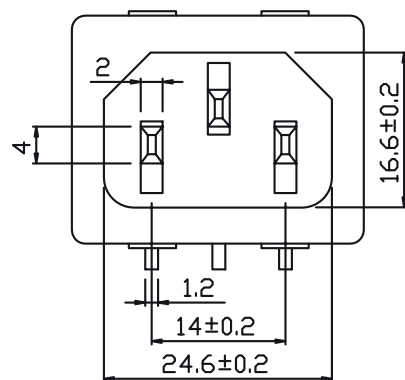
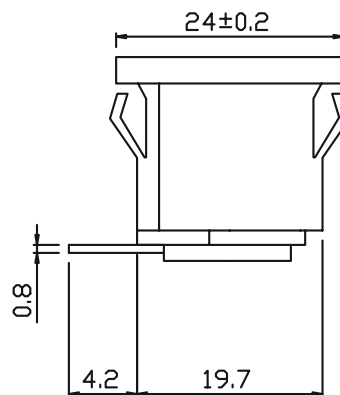
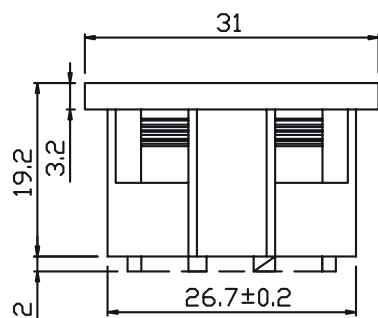


SPECIFICATION:

Current Rating: 250V AC 10A

Contact Resistance: 30mΩ Max.

Insulator Resistance: 100MΩ Min. at DC 500V

Dielectric withstand Strength test: 2000VAC / 1 minute
between each terminals

Insertion and Removal force: 5 ~ 40N


Operating Temperature: -45°C~+105°C

Electrical Life: 5000 cycles Min.

Material:

Insulator: PBT UL 94V-0 or PA66/PC UL 94V-0


Terminal: Brass ,plating Ni.



General description of ordering code

FAMILY	MODEL	VERSION	TYPE
EC	-	C14	AS
			3014

IEC AC INLET



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

AC POWER INLET