

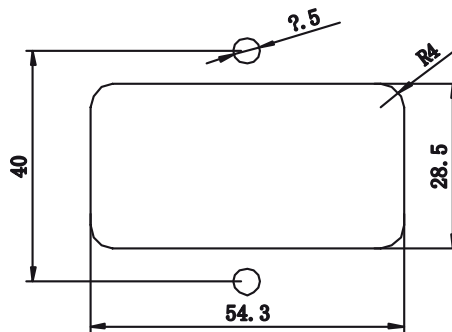
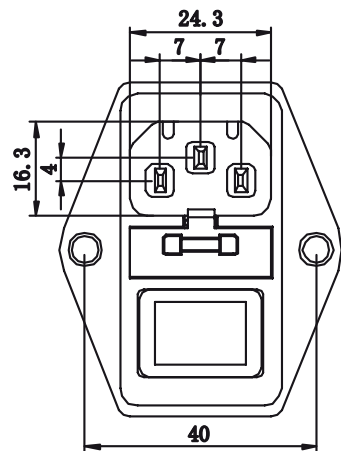


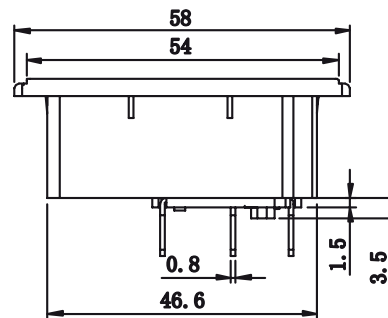

CUT-OUT



## SPECIFICATION:

Current Rating: 250V AC 10A

Contact Resistance: 30mΩ Max.

Insulator Resistance: 100MΩ Min. at DC 500V

Dielectric withstand Strength test: 2000VAC / 1 minute  
between each terminals

Insertion and Removal force: 5 ~ 40N

Operating Temperature: -45°C~+105°C

Electrical Life: 5000 cycles Min.

## Material:

Insulator: PBT UL 94V-0 or PA66/PC UL 94V-0

Terminal: Brass ,plating Ni.



## General description of ordering code

| FAMILY | MODEL | VERSION | TYPE |
|--------|-------|---------|------|
| EC     | -     | C14     | AS   |
|        |       |         | 3031 |

## IEC AC INLET with Fuse & Rocker Switch



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.  
The products and their features may change without notice.

AC POWER INLET