

SPECIFICATIONS

Rating: 0.3A 50VDC

Contact Resistance: 50MΩ max


Insulation Resistance: 500VDC 100MΩ Min

Dielectric Strength: 100V AC 1 Minute


Operating Force: 100gf~800gf

Electrical Life : 10,000 cycles




L=2 - 6



SCHEMATIC



P.C.B. HOLE DETAIL

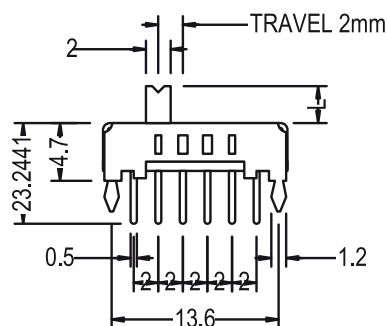


Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG

General description of ordering code

FAMILY	MODEL	POLE/TROW	TRAVELLING	SEQUENTIAL NO.	Knob TYPE
EC7	SS60	24	D	02	RG

(2P4T) Slide Switch Series



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

SWITCHES