


Material:



Housing : LCP, UL 94V-0
Cover Terminal: Phosphor Bronze
Shell: Brass/SPCC

Electrical:

Current Rating : 0.5A
Dielectric Withstanding Voltage : 40V AC Per Minute
Insulation Resistance : 100MΩ MIN
Contact Resistance : 30MΩ MAX
Operating Temperature: -25°C ~+85°C

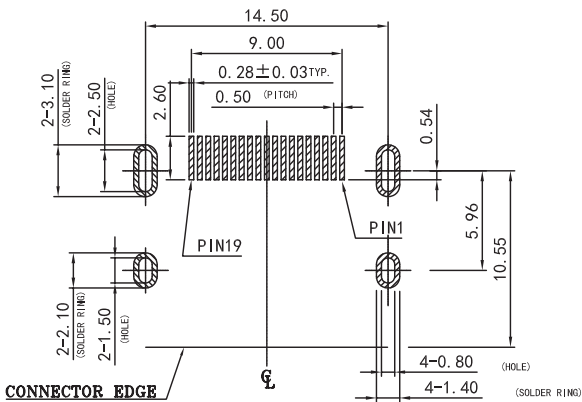

RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCE: ±0.05mm

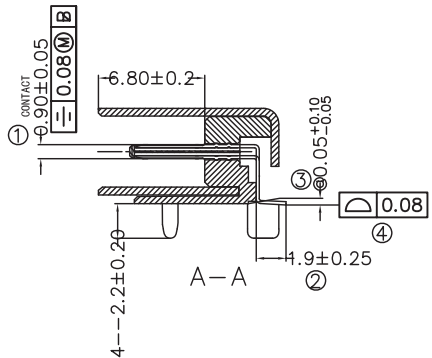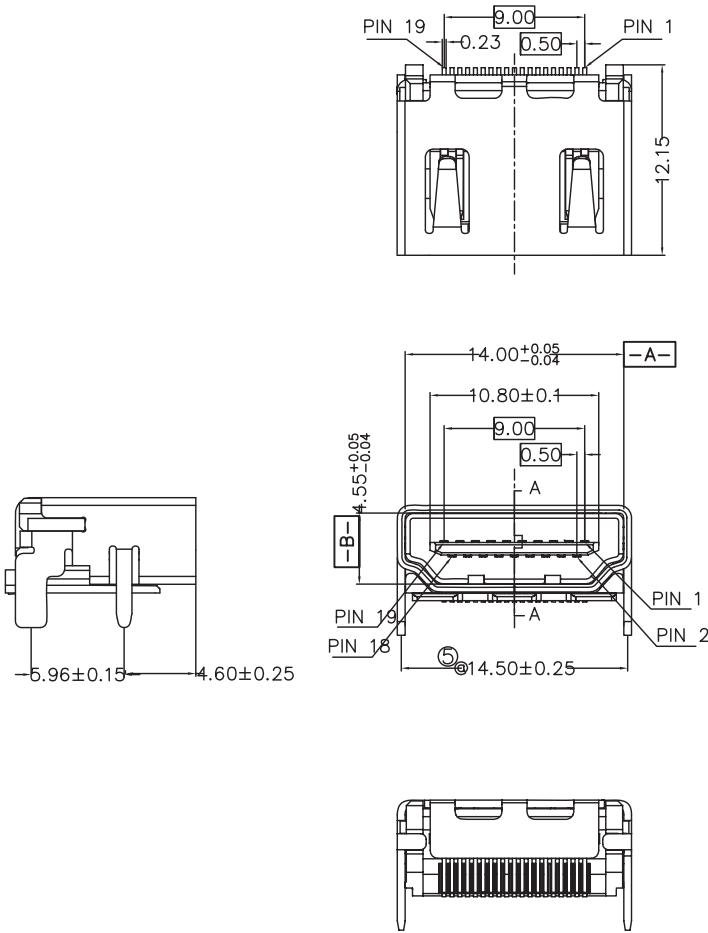

pn: EC-HDMI28501N1



euro-conn



UNITS: mm		SHEET SIZE: ISO A4		SCALE: ----	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

HDMI