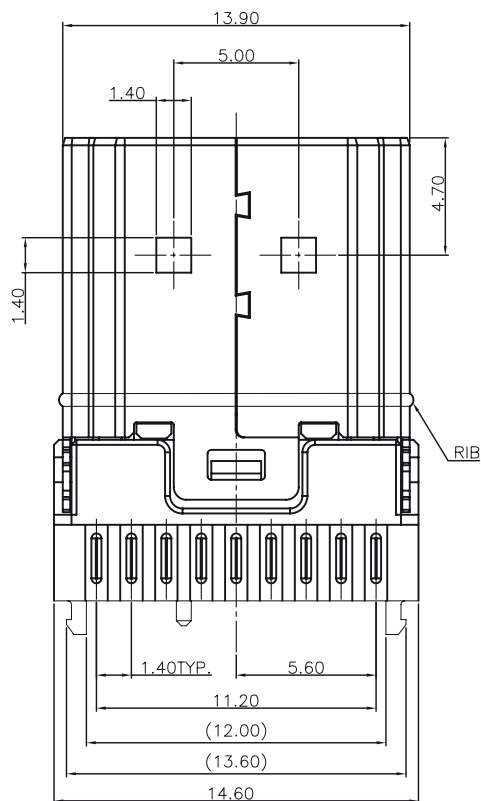


Insulator : LCP, UL 94V-0, Black
Contact: Copper Alloy
Contact Finish : 30u" Gold On Mating End, Tin On Termination End,
With Entire Contact Nickel Underplated.
Shell-Copper Alloy, Nickel Plated

Current Rating : 0.5A
Dielectric Withstanding Voltage : 40V AC Per Minute
Insulation Resistance : 100MΩ MIN
Contact Resistance : 30MΩ MAX
Operating Temperature : -20°C ~ +85°C

Insertion Force: 44.1 N Max.
Withdraw Force: 9.8 N Min.