
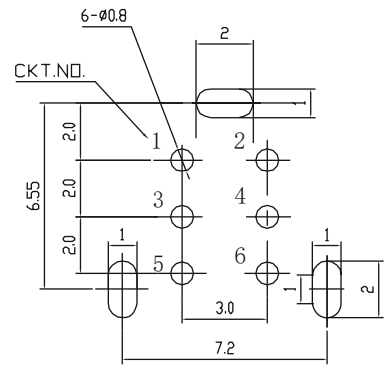
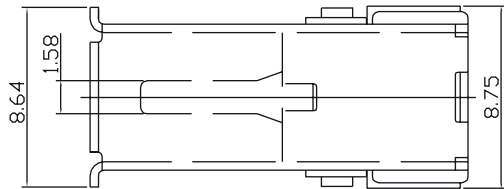
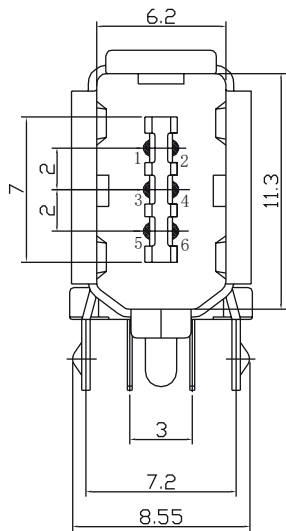


Material:
Housing: Thermoplastic, UL94V-0
Contact: Copper Alloy
Shell: Copper Alloy
Pin Plated: Gold 3u" over 50u" nickel

Electrical Characteristics:
Voltage Current Rating: 1.5AMP.40V AC
Insulation Resistance: 500MΩ Min
Contact Resistance: 50mΩ Max
Dielectric Withstanding Voltage: 500V AC
Temperature Range: -20°C ~+85°C

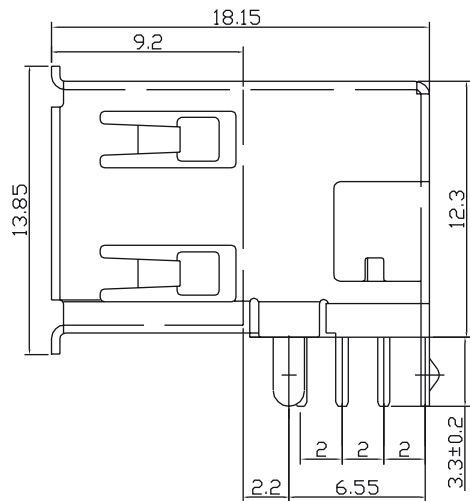

PCB BOARD LAYOUT

4	J	1394V RIGHT PIN	3	H65Y
3	J	1394V LEFT PIN	3	H65Y
2	W	1394V HOUSING	1	H65Y
1	CX	1394V INSERT	1	PA66+30%GF
NO.	CODE	P/N	QTY	MATERIAL



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: xx:xx

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

Rev. n.
xx/xx/xxxx

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

EC1-13946FAB