






TYPE 2

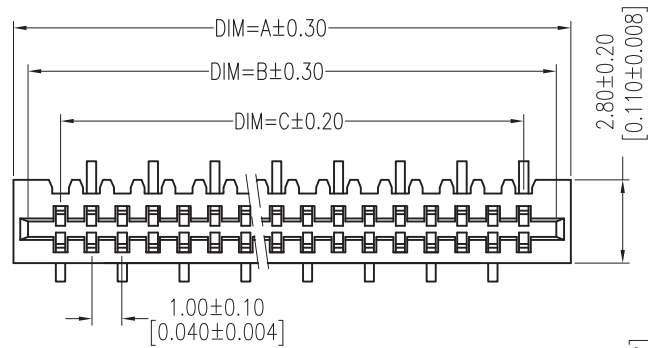

TYPE 1

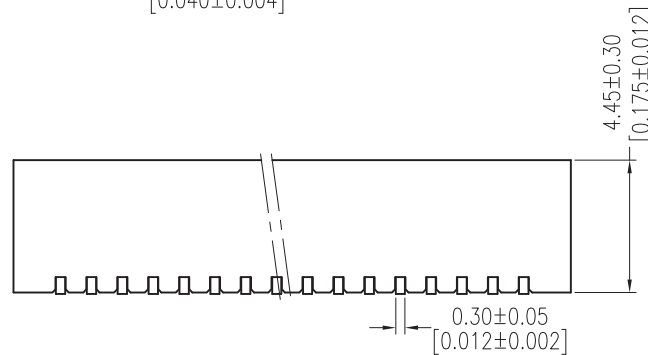

Recommended F.C.B Layout(top side)
(PCB BOARD TOLERANCE±0.05)

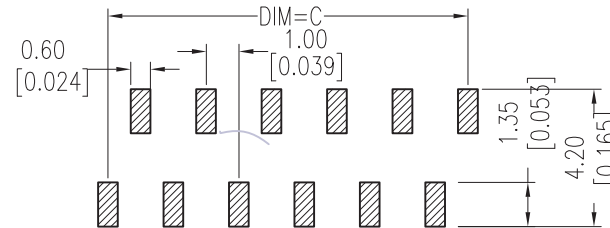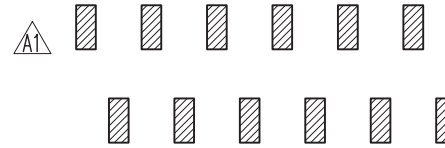

NOTES:

Rated Current:0.4AMP

Contact Resistance:30mΩ max

Withstand Voltage:200V AC/DC

Insulation Resistance:500MΩ min

Operation Temperature:-25℃ to +85℃

Terminal:Phosphor Bronze,Tin-plated

Housing:LCP+30%GF U94V-0

				PIN	DIM=A	DIM=B	DIM=C
PIN	DIM=A	DIM=B	DIM=C	22P	24.0	23.10	21.00
40P	42.0	41.10	39.00	21P	23.0	22.10	20.00
39P	41.0	40.10	38.00	20P	22.0	21.10	19.00
38P	40.0	39.10	37.00	19P	21.0	20.10	18.00
37P	39.0	38.10	36.00	18P	20.0	19.10	17.00
36P	38.0	37.10	35.00	17P	19.0	18.10	16.00
35P	37.0	36.10	34.00	16P	18.0	17.10	15.00
34P	36.0	35.10	33.00	15P	17.0	16.10	14.00
33P	35.0	34.10	32.00	14P	16.0	15.10	13.00
32P	34.0	33.10	31.00	13P	15.0	14.10	12.00
31P	33.0	32.10	30.00	12P	14.0	13.10	11.00
30P	32.0	31.10	29.00	11P	13.0	12.10	10.00
29P	31.0	30.10	28.00	10P	12.0	11.10	9.00
28P	30.0	29.10	27.00	9P	11.0	10.10	8.00
27P	29.0	28.10	26.00	8P	10.0	9.10	7.00
26P	28.0	27.10	25.00	7P	9.0	8.10	6.00
25P	27.0	26.10	24.00	6P	8.0	7.10	5.00
24P	26.0	25.10	23.00	5P	7.0	6.10	4.00
23P	25.0	24.10	22.00	4P	6.0	5.10	3.00

General description of ordering code

FAMILY	PITCH	TYPE	N° PIN	VERSION	PLATING	OPTION	OPTION1	PACKAGE
FPC	100	A2	XX	M [smt straight]	T [tin]	A [Type]	N [standard]	T [tube]
						B [Type]		R [reel]



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

ZIF CONNECTOR