

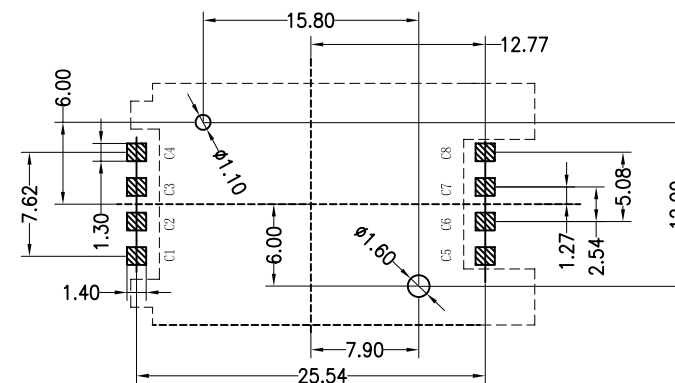
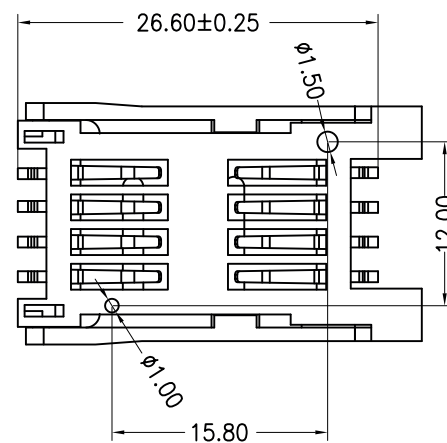
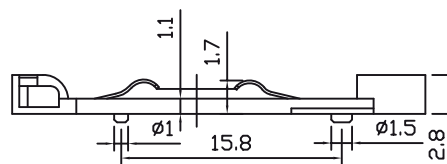


SPECIFICATIONS

Current Rating: 3 Amps
 Insulator body: LCP
 Insulator Resistance: 5000MΩ Min
 Dielectric Withstanding: DC 500V
 Withstanding Voltage: AC 1000V
 Contact Resistance: 20mΩ Max
 Durability: 100gf Cycles Min
 Contact Material: Copper alloy
 Finish: Tin gold or Duplex plated
 Standard: Goid flash all over Nickel
 Operation Temperature: -40° to +105°

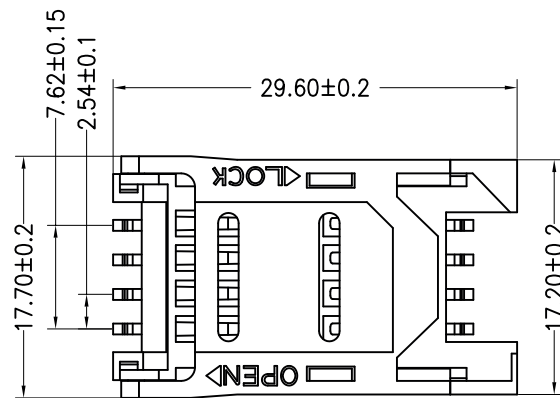

PCB LAYOUT

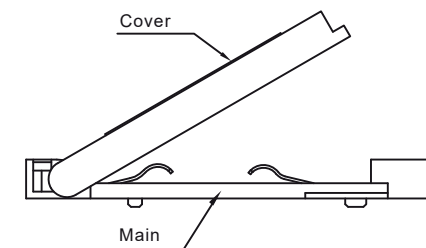

General description of ordering code

FAMILY	N° PIN	PLATING	PEG	OPTION	PACKAGE
SCM12	08	G [Gold]	1 [with peg] 2 [w/o peg]	C [cover]	T [tube] R [reel]



euro-conn



UNITS: mm

> 0 ~ 3
± 0.12

SHEET SIZE: ISO A4

> 3 ~ 18
± 0.15

> 18 ~ 50
± 0.3

SCALE: 10:1

> 50 ~ 120
± 0.5

Rev. n.02
15/05/2018

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

SCM12-08GXCX