
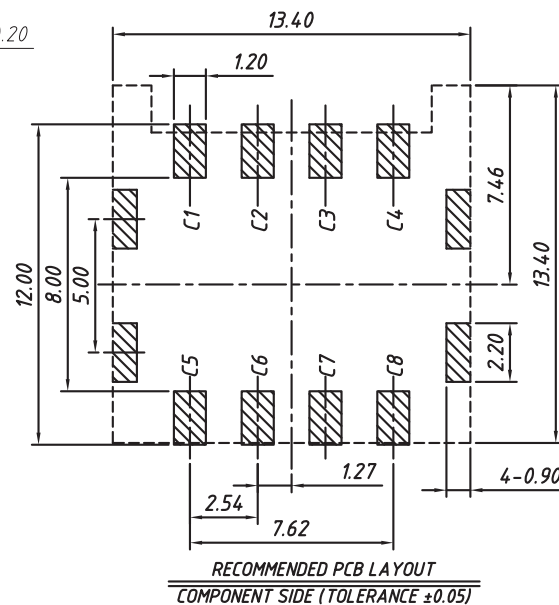
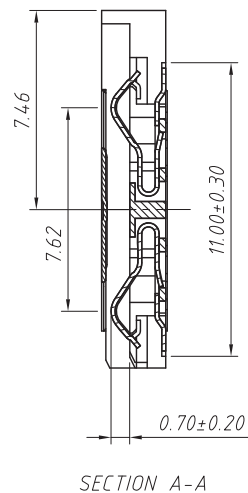


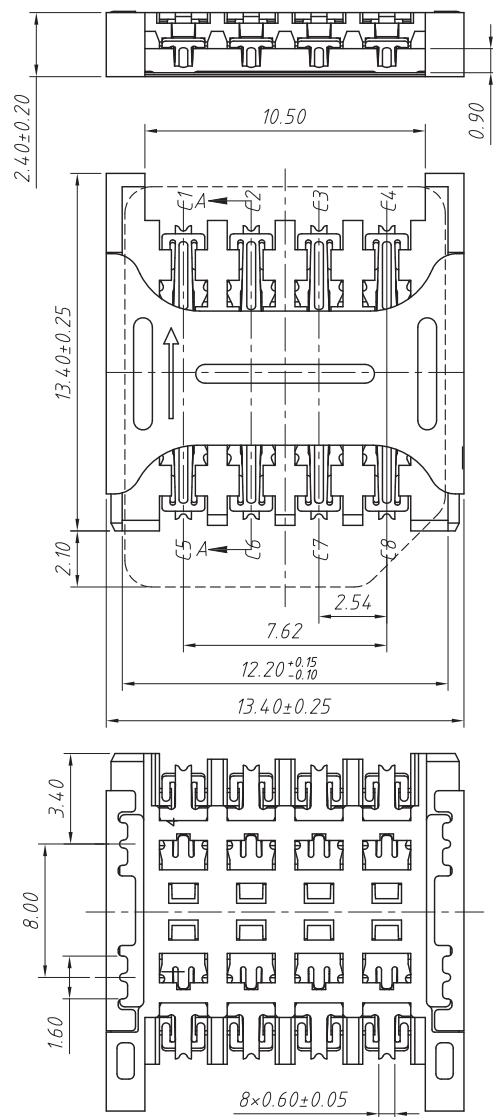

Material:

Base:Hi-Temp Thermoplastic,UL 94 V-0.Black.
Data Contact:Copper Alloy,Gold Plated.
Shell:Stainless Steel,Gold Plated.

Electrical:

1.General characteristics

Dimensions:13.40L×13.40W ×2.40H mm

Weight:Approx0.40±0.1g

Durability:5000 cycles min.

2.Electrical Characteristics

Contact Resistance:50mΩ typical,100Ω Max.

Insulation Resistance:>1000MΩ/500V DC.

3.Solderability

Vapor phase:215°C.30sec.Max.


IR reflow:250°C.5sec.Max.

Manual soldering:370°C.3sec.Max.

4.Environmental Characteristics

Operating Temperature:-40°C TO +85°C

Operating humidity:10%-+95%RH.



General description of ordering code

FAMILY	N° PIN	TYPE
SCM12	08	A091



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

MICRO SIM CARD