

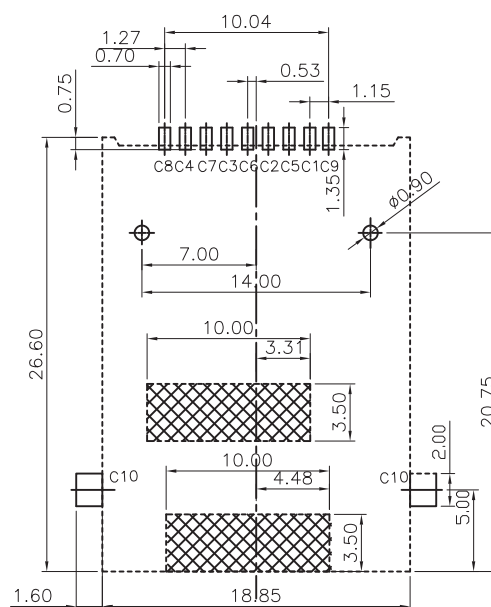


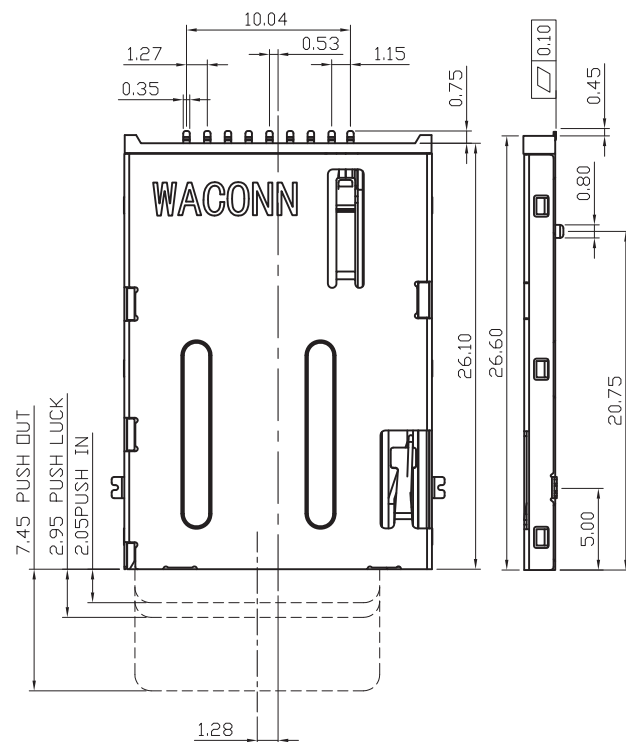

P.C.B. LAYOUT

- PAD AREA
- KEEP AREA
- KEEP OUT AREA



SPECIFICATIONS:


1:ELECTRICAL:

- 1),VOLTAGE RATING:150V AC
- 2),CURRENT RATING:0.5A
- 3),CONTACT RESISTANCE:100mΩ MAX INITIAL;150mΩ MAX FIN
- 4),DIELECTRIC WITHSTANDING VOLTAGE:500 AC 1 MINUTE
- 5),INSULATION RESISTANCE;500mΩ MIN,

2:MATERIAL:


INSULATOR:LCP UL 94V-0 BLACK;
TERMINAL: COPPER ALLOY;

3:OPERATING TEMPERATURE: -25°C TO +85°C

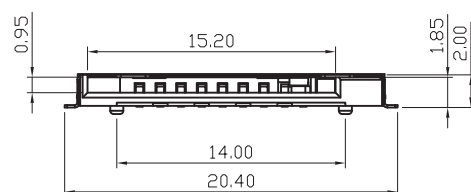


Pn: SCM20-SD108-A

Circuit Diagram for Card Detect Switch



SIM pin assignment	
PIN#	Name
PIN1	VCC
PIN2	RST
PIN3	CLK
PIN4	Reserved
PIN5	GND
PIN6	VPP
PIN7	I/O
PIN8	Reserved
PIN9	CD
PIN10	GND



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

SOCKET CARD